




Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

NPN 2N6515, 2N6517 PNP 2N6519, 2N6520

Features

- Through Hole Package
- 150°C Junction Temperature
- Voltage and Current are negative for PNP transistors

Pin Configuration
Bottom View



High Voltage Transistor 625mW


Mechanical Data

- Case: TO-92, Molded Plastic
- Polarity: indicated as above.

Maximum Ratings @ 25°C Unless Otherwise Specified

Charateristic	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	250	V
2N6515		300	
2N6519		350	
2N6517, 2N6520			
Collector-Base Voltage	V_{CBO}	250	V
2N6515		300	
2N6519		350	
2N6517, 2N6520			
Emitter-Base Voltage	V_{EBO}	6.0	V
2N6515-6517		5.0	
2N6519-6520			
Base Current	I_B	250	mA
Collector Current(DC)	I_C	500	mA
Power Dissipation@TA=25°C	P_d	625	W
		5.0	mW/°C
Power Dissipation@TC=25°C	P_d	1.5	W
		12	mW/°C
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W
Operating & Storage Temperature	T_j, T_{STG}	-55~150	°C

TO-92

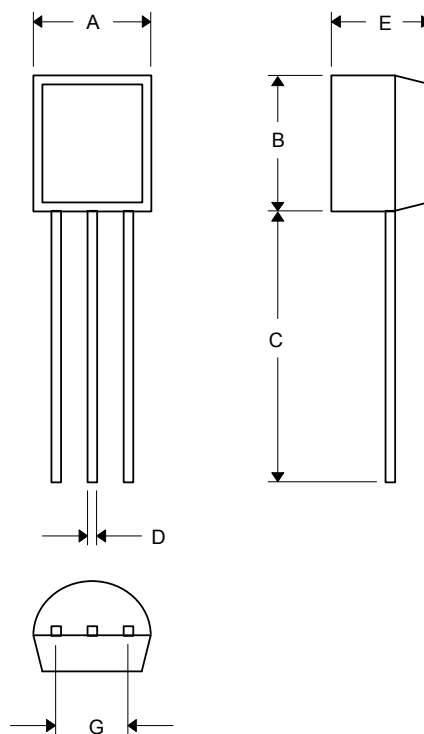

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.46	4.70	
C	.500	—	12.7	—	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	

NPN 2N6515 2N6517

PNP 2N6519 2N6520



ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector–Emitter Breakdown Voltage ⁽¹⁾ (I _C = 1.0 mAdc, I _B = 0)	V _{(BR)CEO}	250 300 350	— — —	Vdc
Collector–Base Breakdown Voltage (I _C = 100 µAdc, I _E = 0)	V _{(BR)CBO}	250 300 350	— — —	Vdc
Emitter–Base Breakdown Voltage (I _E = 10 µAdc, I _C = 0)	V _{(BR)EBO}	6.0 5.0	— —	Vdc
Collector Cutoff Current (V _{CB} = 150 Vdc, I _E = 0) (V _{CB} = 200 Vdc, I _E = 0) (V _{CB} = 250 Vdc, I _E = 0)	I _{CBO}	— — —	50 50 50	nAdc
Emitter Cutoff Current (V _{EB} = 5.0 Vdc, I _C = 0) (V _{EB} = 4.0 Vdc, I _C = 0)	I _{EBO}	— —	50 50	nAdc
ON CHARACTERISTICS⁽¹⁾				
DC Current Gain (I _C = 1.0 mAdc, V _{CE} = 10 Vdc)	h _{FE}	35 30 20	— — —	—
(I _C = 10 mAdc, V _{CE} = 10 Vdc)		50 45 30	— — —	
(I _C = 30 mAdc, V _{CE} = 10 Vdc)		50 45 30	300 270 200	
(I _C = 50 mAdc, V _{CE} = 10 Vdc)		45 40 20	220 200 200	
(I _C = 100 mAdc, V _{CE} = 10 Vdc)		25 20 15	— — —	
Collector–Emitter Saturation Voltage (I _C = 10 mAdc, I _B = 1.0 mAdc) (I _C = 20 mAdc, I _B = 2.0 mAdc) (I _C = 30 mAdc, I _B = 3.0 mAdc) (I _C = 50 mAdc, I _B = 5.0 mAdc)	V _{CE(sat)}	— — — —	0.30 0.35 0.50 1.0	Vdc
Base–Emitter Saturation Voltage (I _C = 10 mAdc, I _B = 1.0 mAdc) (I _C = 20 mAdc, I _B = 2.0 mAdc) (I _C = 30 mAdc, I _B = 3.0 mAdc)	V _{BE(sat)}	— — —	0.75 0.85 0.90	Vdc
Base–Emitter On Voltage (I _C = 100 mAdc, V _{CE} = 10 Vdc)	V _{BE(on)}	—	2.0	Vdc

1. Pulse Test: Pulse Width ≤ 300 µs, Duty Cycle ≤ 2.0%.

NPN 2N6515 2N6517

PNP 2N6519 2N6520



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Max	Unit
SMALL-SIGNAL CHARACTERISTICS				
Current-Gain — Bandwidth Product ⁽¹⁾ ($I_C = 10\text{ mA}$, $V_{CE} = 20\text{ Vdc}$, $f = 20\text{ MHz}$)	f_T	40	200	MHz
Collector-Base Capacitance ($V_{CB} = 20\text{ Vdc}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{cb}	—	6.0	pF
Emitter-Base Capacitance ($V_{EB} = 0.5\text{ Vdc}$, $I_C = 0$, $f = 1.0\text{ MHz}$)	C_{eb}	— —	80 100	pF
SWITCHING CHARACTERISTICS				
Turn-On Time ($V_{CC} = 100\text{ Vdc}$, $V_{BE(off)} = 2.0\text{ Vdc}$, $I_C = 50\text{ mA}$, $I_{B1} = 10\text{ mA}$)	t_{on}	—	200	μs
Turn-Off Time ($V_{CC} = 100\text{ Vdc}$, $I_C = 50\text{ mA}$, $I_{B1} = I_{B2} = 10\text{ mA}$)	t_{off}	—	3.5	μs

1. Pulse Test: Pulse Width $\leq 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2.0\%$.

NPN 2N6515 2N6517 PNP 2N6519 2N6520

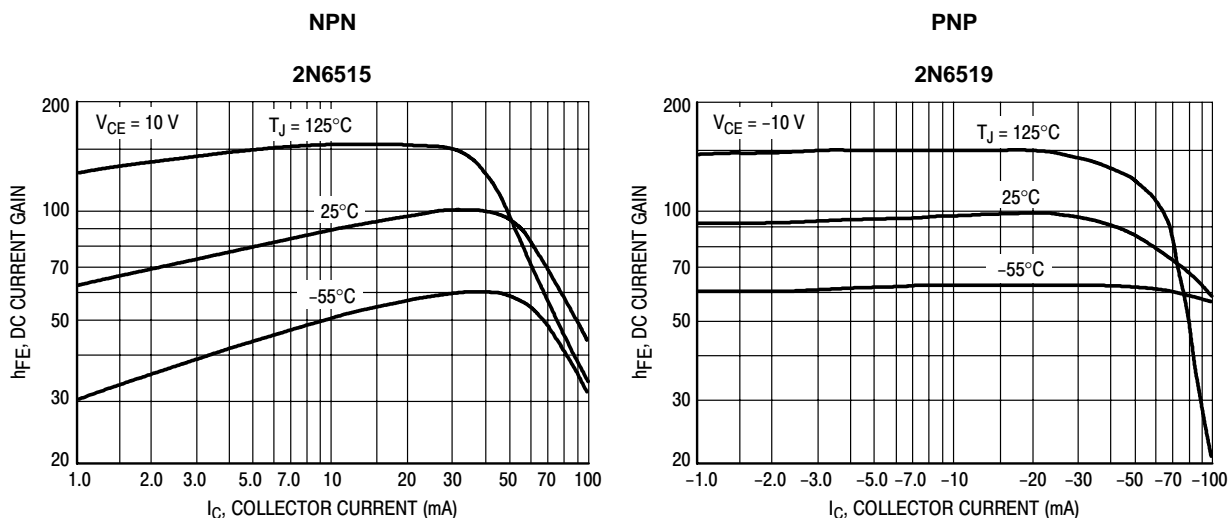


Figure 1. DC Current Gain

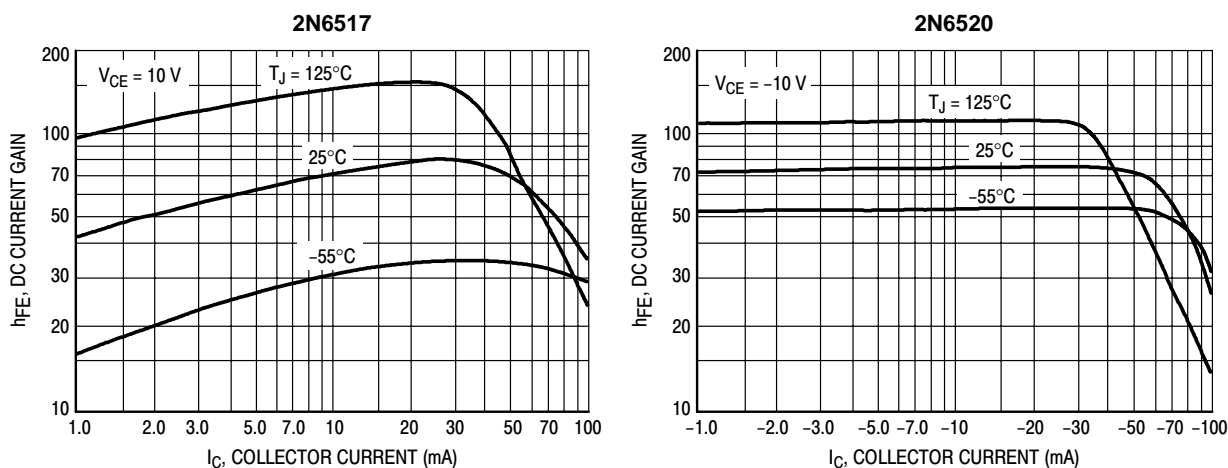


Figure 2. DC Current Gain

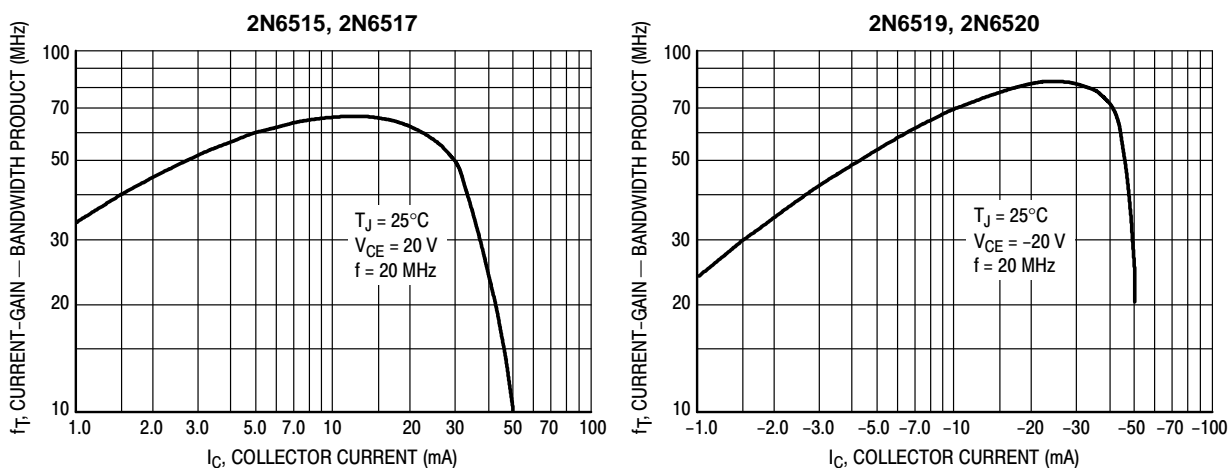


Figure 3. Current-Gain — Bandwidth Product

NPN 2N6515 2N6517

PNP 2N6519 2N6520

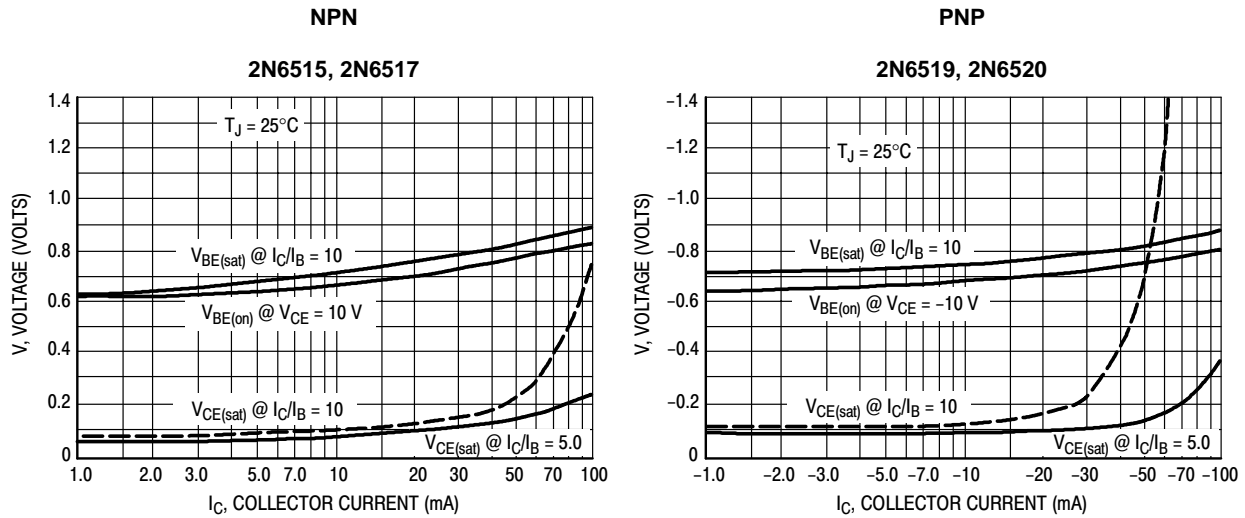


Figure 4. "On" Voltages

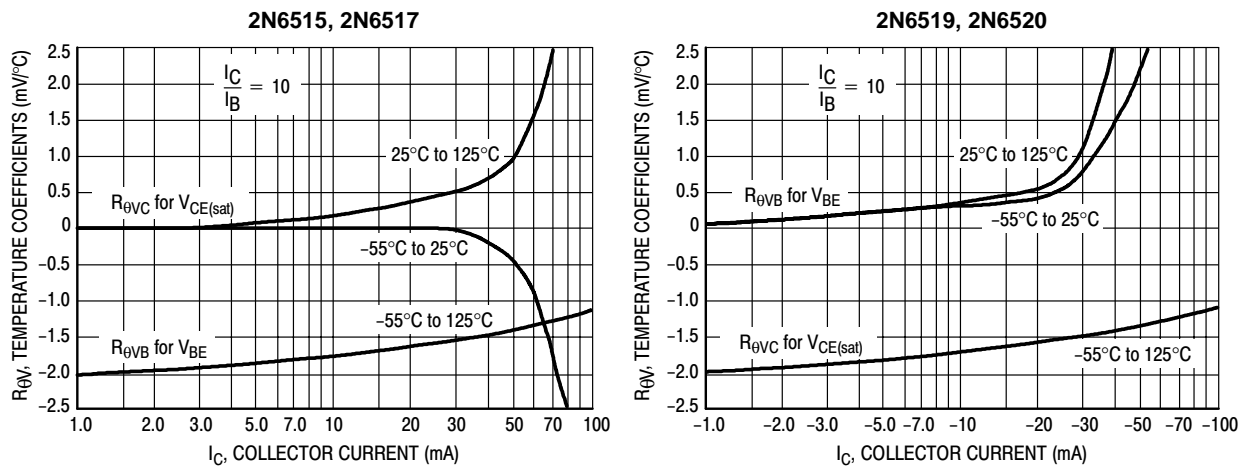


Figure 5. Temperature Coefficients

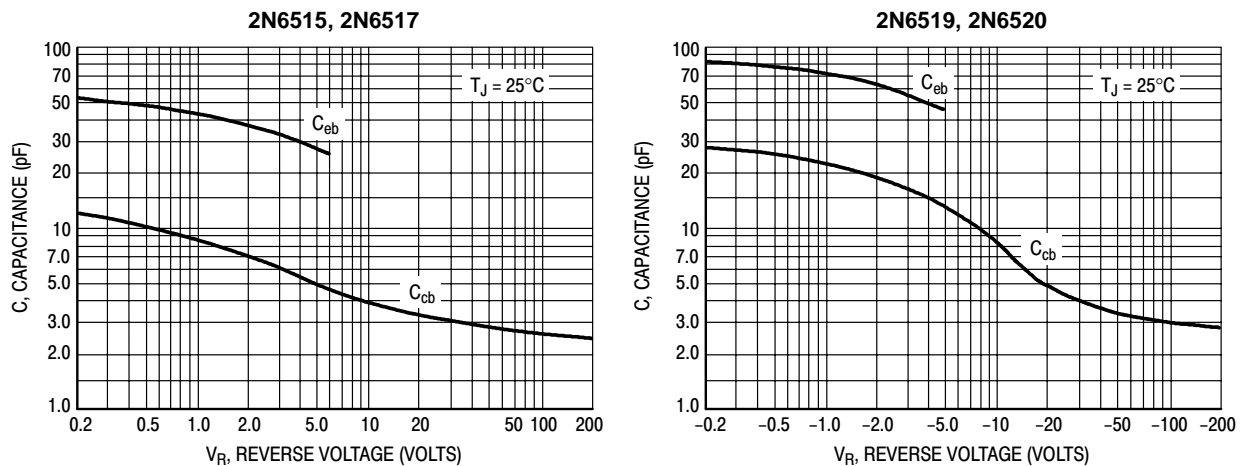


Figure 6. Capacitance

NPN 2N6515 2N6517

PNP 2N6519 2N6520

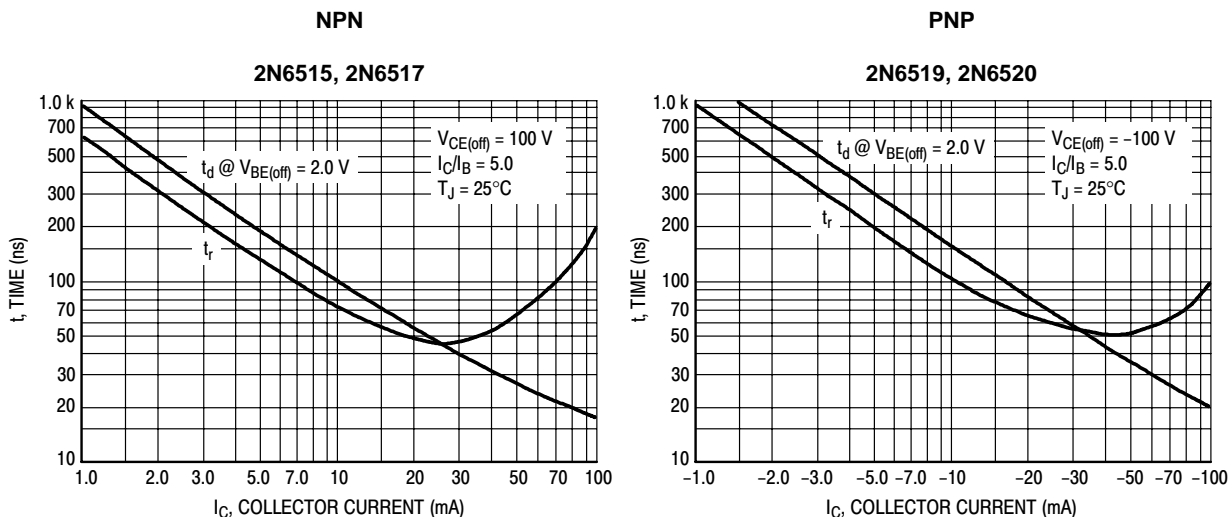


Figure 7. Turn-On Time

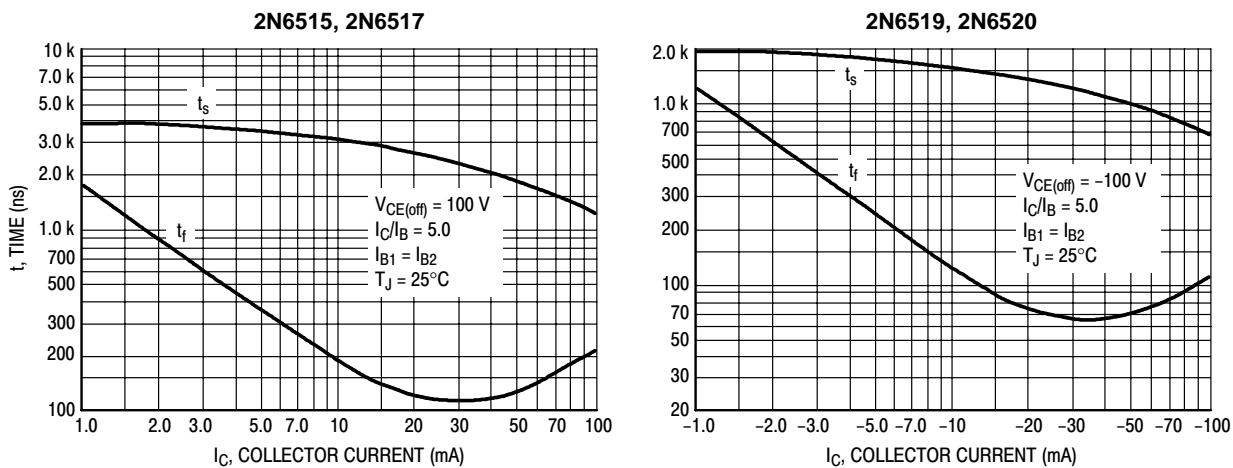


Figure 8. Turn-Off Time