

FAN8004

5-CH Motor Driver

Features

- 4-CH balanced transformerless (BTL) driver
- 1-CH (forward-reverse) control DC motor driver
- Operating supply voltage (4.5V ~ 13.2V)
- Built-in thermal shut down circuit (TSD)
- Built-in under voltage lockout circuit (UVLO)
- Built-in over voltage protection circuit (OVP)
- Built-in mute circuit (CH1, CH2, CH3 and CH4)
- Built-in normal OP-AMP
- Built-in 5V regulator with reset

Description

The FAN8004 is a monolithic integrated circuit suitable for a 5-ch motor driver which drives the tracking actuator, focus actuator, sled motor, spindle motor, and tray motor of the CDP/DVDP/MDP system.

48-QFP-1010E




Typical Applications

- Compact Disc Player
- Mini Disc Player
- Digital Video Disk Player

Ordering Information

Device	Package	Operating Temp.
FAN8004	48-QFP-1010E	-35°C ~ +85°C

Pin Assignments

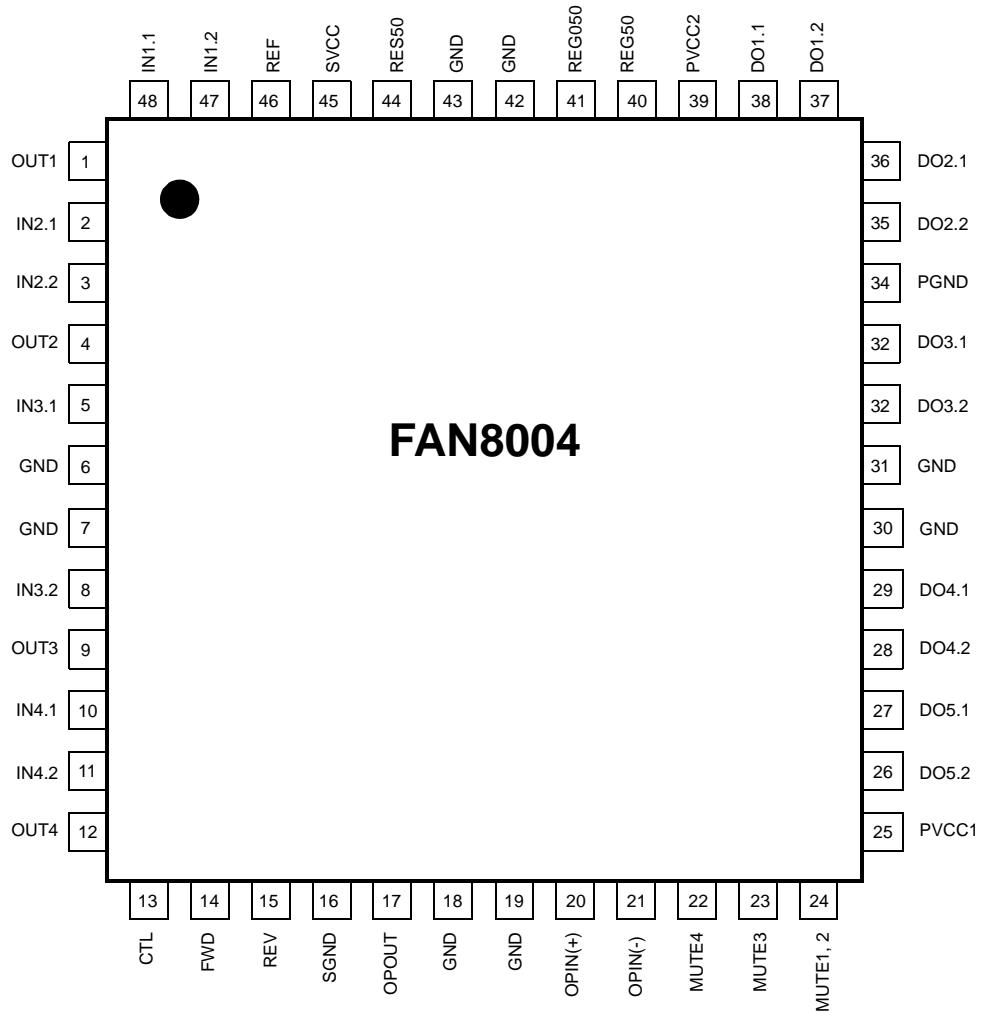


Pin Definitions

Pin Number	Pin Name	I/O	Pin Function Description
1	OUT1	O	CH 1 op-amp output
2	IN2.1	I	CH 1 op-amp input (+)
3	IN2.2	I	CH 2 op-amp input (-)
4	OUT2	O	CH 2 op-amp output
5	IN3.1	I	CH 3 op-amp input (+)
6	GND	-	Ground
7	GND	-	Ground
8	IN3.2	I	CH 3 op-amp input (-)
9	OUT3	O	CH 3 op-amp output
10	IN4.1	I	CH 4 op-amp input (+)
11	IN4.2	I	CH 4 op-amp input (-)
12	OUT4	O	CH 4 op-amp output
13	CTL	I	CH 5 motor speed control
14	FWD1	I	CH 5 forward input
15	REW1	I	CH 5 reverse input
16	SGND	-	Signal ground
17	OPOUT	O	Opamp output
18	GND	-	Ground
19	GND	-	Ground
20	OPIN(+)	I	Opamp input (+)
21	OPIN(-)	I	Opamp inpt (-)
22	MUTE4	I	CH 4 mute
23	MUTE3	I	CH 3mute
24	MUTE1, 2	I	CH 1, CH 2 mute
25	PVCC1	-	Power supply voltage (For CH 5)
26	DO5.2	O	CH 5 drive output
27	DO5.1	O	CH 5 drive output
28	DO4.2	O	CH 4 drive output
29	DO4.1	O	CH 4 drive output
30	GND	-	Ground
31	GND	-	Ground
32	DO3.2	O	CH 3 drive output
33	DO3.1	O	CH 3 drive output
34	PGND	-	Power ground
35	DO2.2	O	CH 2 drive output
36	DO2.1	O	CH 2 drive output
37	DO1.2	O	CH 1 drive output
38	DO1.1	O	CH 1 drive output
39	PVCC2	-	Power supply voltage (For CH 1, CH 2, CH 3, CH 4)

Pin Definitions

Pin Number	Pin Name	I/O	Pin Function Description
40	REG50	O	Regulator output
41	REG050	O	Regulator 5V output
42	GND	-	Ground
43	GND	-	Ground
44	RES50	I	Regulator reset
45	SVCC	-	Signal supply voltage
46	REF	I	Bias voltage input
47	IN1.1	I	CH 1 opamp input (+)
48	IN1.2	I	CH 1 opamp input (-)

Internal Block Diagram

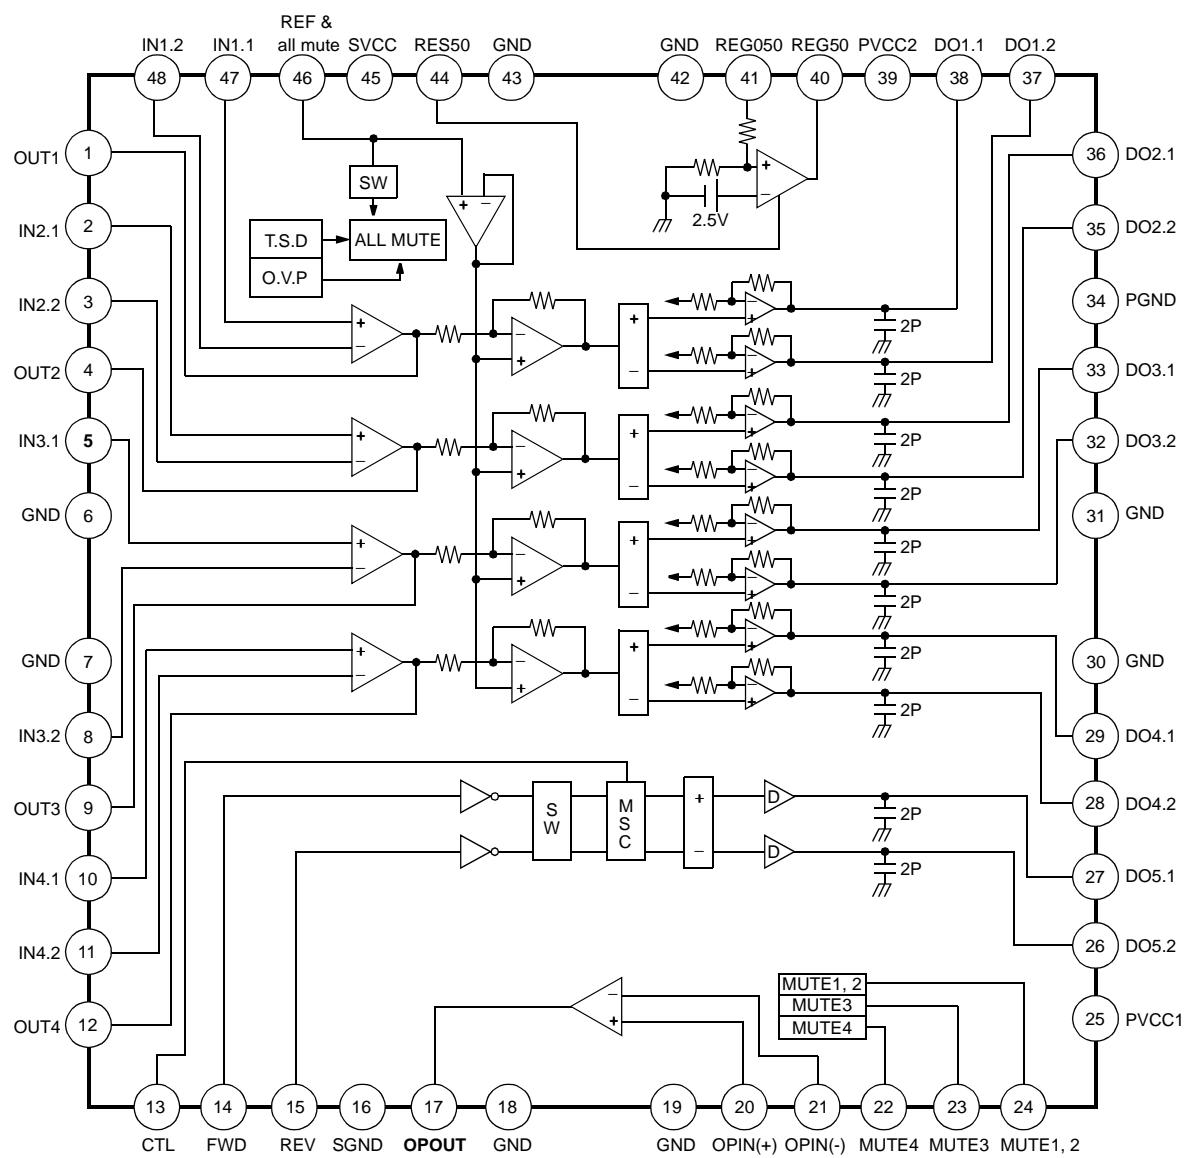





Notes:

1. SW = Logic switch
2. MSC = Motor speed control
3. D = Output driver




Equivalent Circuits

Description	Pin No.	Internal circuit
Input OPIN (+) OPIN (-)	47, 2, 5, 10 48, 3, 8, 11	
Input opout	1, 4, 9, 12	
CTL	13	

Equivalent Circuits (Continued)

Description	Pin No.	Internal circuit
Logic drive FWD input REV input	14 15	
CH mute	22, 23, 24	
Logic drive output	26, 27	
4-CH drive output	28, 29 32, 33 35, 36 37, 38	

Equivalent Circuits (Continued)

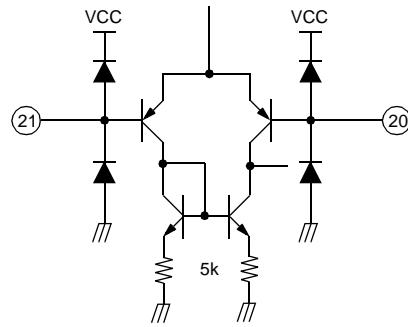Description	Pin No.	Internal circuit
Normal opout	17	
Normal OPIN(+) OPIN(-)	20 21	
Ref	46	

Equivalent Circuits (Continued)


Description	Pin No.	Internal circuit
RES50	44	
REG050	41	
REG50	40	

Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Value	Unit
Maximum supply voltage	V _{CCMAX}	18	V
Power dissipation	P _D	2.3 ^{note}	W
Operating temperature	T _{OPR}	-35 ~ +85	°C
Storage temperature	T _{STG}	-55 ~ +150	°C
Maximum output current	I _{OMAX}	1	A

NOTE:

1. When mounted on 70mm × 70mm × 1.6mm PCB.
2. Power dissipation reduces 18.4mW / °C for using above Ta=25°C.
3. Do not exceed Pd and SOA.

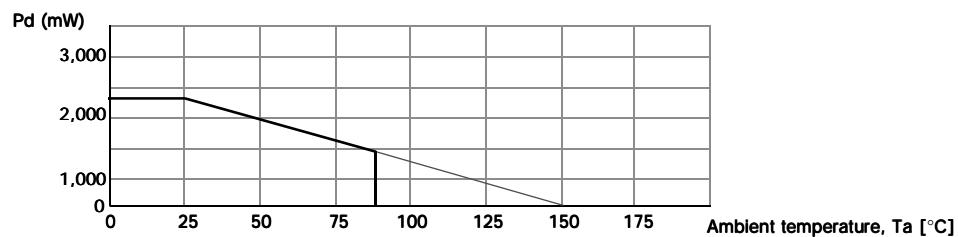

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
Signal supply voltage	S _{VCC}	4.5	-	13.2	V
Power supply voltage	P _{VCC1}	4.5	-	13.2	V
Power supply voltage	P _{VCC2}	4.5	-	13.2	V

Electrical Characteristics (Ta = 25°C)

(SVCC=PVCC1=PVCC2=8V, Ta=25°C, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Quiescent circuit current	I _{CC}	under no-load	10	14	18	mA
All mute on current	I _{MUTE ALL}	Pin 46=GND	-	8	10	mA
All mute on voltage	V _{MON ALL}	Pin 46=Variation	-	-	0.5	V
All mute off voltage	V _{MOFF ALL}	Pin 46=Variation	2	-	-	V
CH mute on voltage	V _{MON CH}	Pin 22, 23, 24=Variation	2	-	-	V
CH mute off voltage	V _{MOFF ALL}	Pin 22, 23, 24=Variation	-	-	0.5	V
DRIVER PART (RL=8Ω)						
Input offset voltage	V _{IO}	-	-20	-	+20	mV
Output offset voltage	V _{OO}	V _{IN} =2.5V	-50	-	+50	mV
Maximum output voltage 1	V _{OM1}	V _{CC} =8V, R _L =8Ω	4.7	5.5	-	V
Maximum output voltage 2	V _{OM2}	V _{CC} =13V, R _L =24Ω	7	9	-	V
Closed-loop voltage gain	A _{VF}	V _{IN} =0.1VRMS	9	10.5	12	dB
Ripple rejection ratio	RR	V _{IN} =0.1VRMS, f=120kHz	-	50	-	dB
Slew rate	SR	Square, V _{out} =2Vp-p, f=120kHz	-	0.8	-	V/μs
NORMAL OPAMP PART						
Input offset voltage	V _{OF1}	-	-10	-	+10	mV
Input bias current	I _{B1}	-	-	-	300	nA
High level output voltage	V _{OH1}	R _L =50Ω	6	6.8	-	V
Low level output voltage	V _{OL1}	R _L =50Ω	-	1.0	1.8	V
Output sink current	I _{SINK1}	V _{IN} =-75dB, f=1kHz	10	40	-	mA
Output source current	I _{SOURCE1}	V _{IN} =-20dB, f=120kHz	10	40	-	mA
Open loop voltage gain	G _{VO1}	Square, V _{out} =2Vp-p, f=120kHz	-	75	-	dB
Ripple rejection ratio	RR1	V _{IN} =-20dB, f=1kHz	-	65	-	dB
Slew rate	SR1	-	-	1	-	V/μs
Common mode rejection ratio	CMRR1	-	-	80	-	dB

Electrical Characteristics (Continued)

($V_{CC}=PV_{CC1}=PV_{CC2}=8V$, $T_a=25^\circ C$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
INPUT OPAMP PART						
Input offset voltage	V_{OF2}	-	-10	-	+10	mV
Input bias current	I_{B2}	-	-	-	400	nA
High level output voltage	V_{OH2}	-	7	7.7	-	V
Low level output voltage	V_{OL2}	-	-	0.2	0.5	V
Output sink current	I_{SINK2}	-	500	800	-	μA
Output source current	$I_{SOURCE2}$	-	500	800	-	μA
Open loop voltage gain	G_{VO2}	$V_{IN}=-75dB, f=1kHz$	-	80	-	dB
Slew rate	$SR2$	Square, $V_{out}=2Vp-p, f=120kHz$	-	1	-	$V/\mu s$
Common mode rejection ratio	$CMRR2$	$V_{IN}=-20dB, f=1kHz$	-	80	-	dB
5V REGULATOR PART						
Regulator output voltage	V_{reg}	$I_L=100mA$	4.75	5	5.25	V
Load regulation	$DVR1$	$I_L=0 \rightarrow 200mA$	-40	0	+10	mV
Line regulation	DV_{CC}	$I_L=200mA, V_{CC}=6V \rightarrow 9V$	-20	0	+30	mV
Reset on voltage	$Reson$	-	-	-	0.5	V
Reset off voltage	$Resoff$	-	2	-	-	V
TRAY, CHANGER DRIVER PART($R_L=45\Omega$)						
Input high level voltage	V_{IH}	-	2	-	-	V
Input low level voltage	V_{IL}	-	-	-	0.5	V
Output voltage 1	V_{O1}	$V_{CC}=8V, V_{CTL}=3.5V, R_L=8\Omega$	5.3	5.6	5.9	V
Output voltage 2	V_{O2}	$V_{CC}=8V, V_{CTL}=3.5V, R_L=45\Omega$	5.2	6.0	6.8	V
Output voltage 3	V_{O3}	$V_{CC}=13V, V_{CTL}=4.5V, R_L=45\Omega$	7.5	8.5	9.5	V
Output load regulation	$DVR1$	-	-	300	700	mV
Output offset voltage 1	V_{OO1}	$V_{IN}=5V, 5V$	-10	-	+10	mV
Output offset voltage 2	V_{OO2}	$V_{IN}=0V, 0V$	-10	-	+10	mV

Application Information

1. Reference Input & Mute

Pin 46 (REF) uses the reference input pin or the all mute input pin a reference input block circuit.

- Reference input

In the case of external reference input, the applied voltage range must be between 2[V] and 6.5[V] at VCC=8[V].

- All mute input

Using the all mute function pin, the applied voltage condition is as follows.

All mute on voltage	Below 0.5[V]	Mute function operation
All mute off voltage	Above 2.0[V]	Normal operation

2. Separated Channel Mute Function

These pins are used for the individual channel mute operation.

- When the mute pins (pin22, 23 and 24) are high level, the mute circuits are activated so that the output circuit is muted.
- When the voltage of the mute pins (pin22, 23 and 24) are low level, the mute circuit is stopped and output circuits operate normally.
- If the chip temperature rises above 175°C, then the thermal shutdown (TSD) circuit is activated and the output circuits are muted.
 - Mute 1, 2 (pin 24)-CH1, 2 mute control input pin.
 - Mute 3 (pin 23)-CH3 mute control input pin.
 - Mute 4 (pin 22)-CH4 mute control input pin.

3. Protection Function

- Thermal shutdown (TSD)

If the chip temperature rises above 175°C, then the thermal shutdown (TSD) circuit is activated and the output circuit is muted. The TSD circuit is temperature hysteresis about 25°C.

- Under voltage lockout (UVLO) and over voltage protection (OVP)

It is designed to mute operate the internal bias by the function of UVLO and OVP, when the power supply voltage falls below 3.5[V] or above 20[V].

4. Regulator & Reset Function

The regulator and reset circuits are as illustrated in Figure 1.

where R1=R2.

- The external circuit is composed of the transistor, KSB772 and a capacitor, about 33[mF]. The capacitor is used as a ripple eliminator and should have good temperature characteristics.
- The regulator output voltage (pin 41) is decided as follows.
 $V_{out} = 2 \times 2.5 = 5[V]$ (where R1=R2)
- When the voltage of pin 44 (Vreset) is at 5[V], regulator output voltage(pin 41) is 5[V], and if 0[V], the output voltage of pin 41 is 0[V].


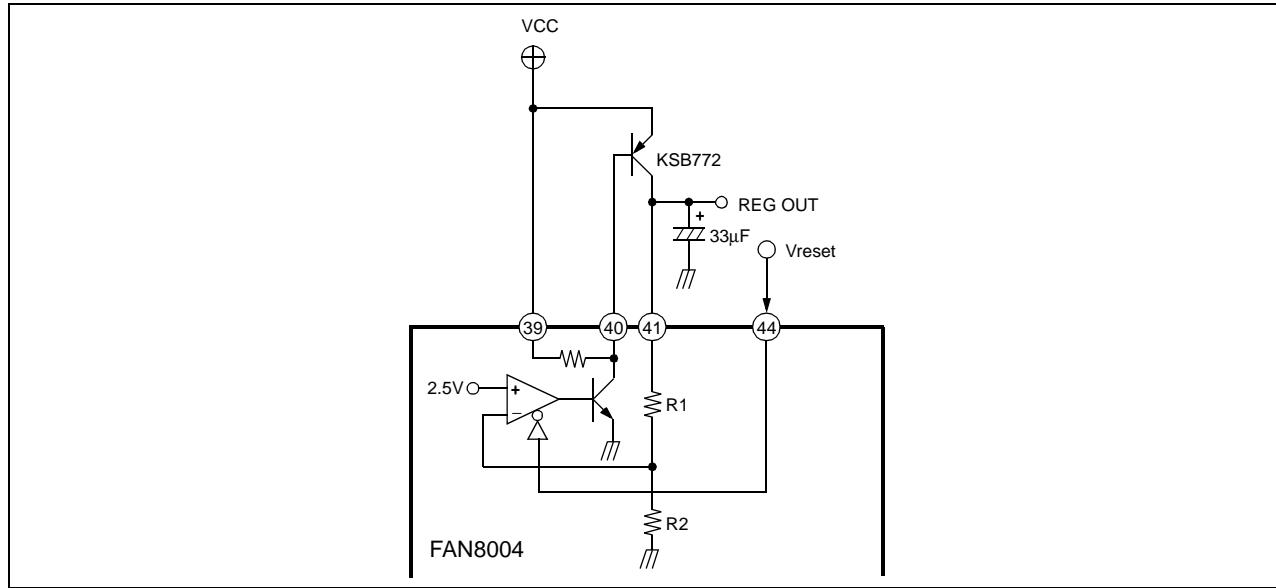


Figure 1. Regulator circuit


5. Focus, Tracking Actuator, Apindle, Sled Motor Drive Part

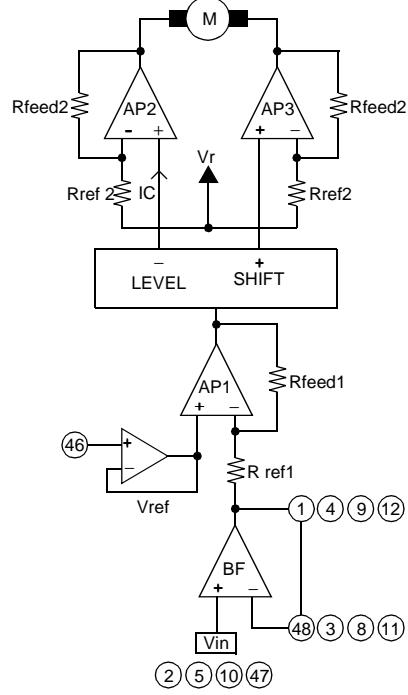

- The voltage, V_{ref} is the reference voltage given by the external bias voltage of pin 46.
- The input signal (V_{in}) through pin 2, 5, 10 and 47 are by the AP1 amplified one times ($R_{ref1} = R_{feed1}$) and then fed to the level shift.
- The level shift produces the current due to the difference between the input signal and the arbitrary reference signal. The current produced as +DI and -DI are fed into the output amplifier. Where output amplifier (AP2, 3) gain is two times (all $R_{ref2} = R_{feed2}$).
- If you desire to change the gain, the input buffer amplifier (BF) can be used.
- The output stage is the balanced transformerless (BTL) driver.
- The bias voltage V_r is expressed as below;

$$V_r = \frac{V_{CC} - V_{BE}}{2} [V]$$

6. Tray, Change Motor Drive Part

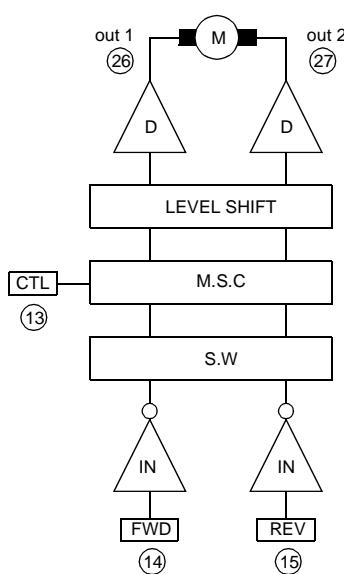

- Rotational Direction Control


The forward and reverse rotational direction is controlled by FWD (pin 14), and REV (pin 15) inputs. Conditions are as follows.

INPUT		OUTPUT		
FWD	REV	OUT 1	OUT 2	State
H	H	Vr	Vr	Brake
H	L	H	L	Forward
L	H	L	H	Reverse
L	L	Vr	Vr	Brake


- where Vris ($V_{CC}-V_{be}$) / 2 = 3.65V (at $V_{CC} = 8V$)
- where Out1 pins are pins 24 and 26, and out2 pins are pins 25 and 27
- Motor Speed Control
 - The almost maximum torque is obtained when it is used with the pins 13 (CTL) open.
 - If the torque of the motor is too low, then the applied voltage at pins 13 (CTL) is 0[V].
 - When motor speed controlled, the applied voltage of the pins 13 (CTL) is between 0 and 4V. Also, if speed control is constant , the applied voltage of the pins 13 (CTL) is between 4 and 5V.
 - This IC's applied maximum voltage is 6V when V_{CC} is 8V.
 - You must not use the applied CTL voltage above 5.8V when V_{CC} is 8V, and 3V when V_{CC} is 5V.

Typical Performance Characteristics


Total circuit

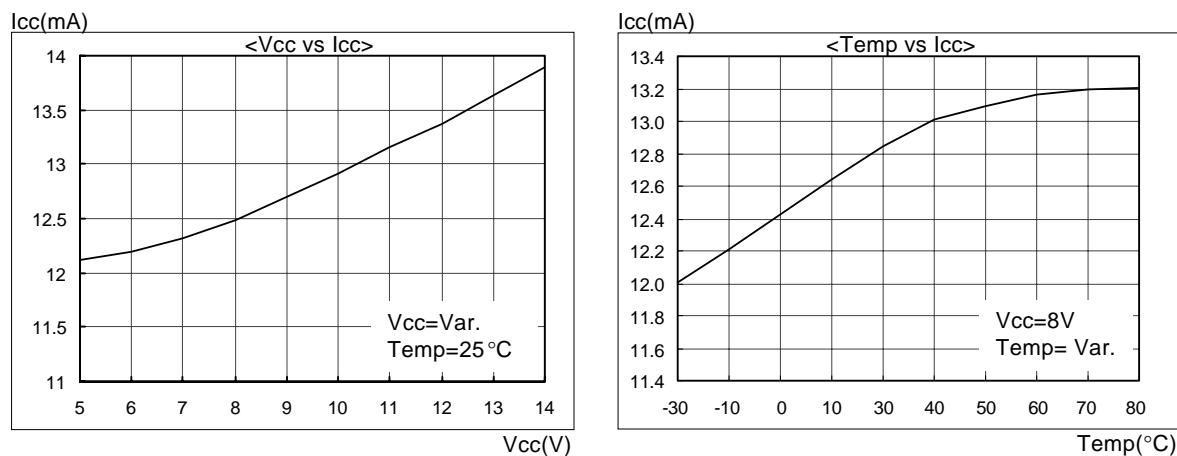





Focus, Tracking, Spindle, Sled drive part

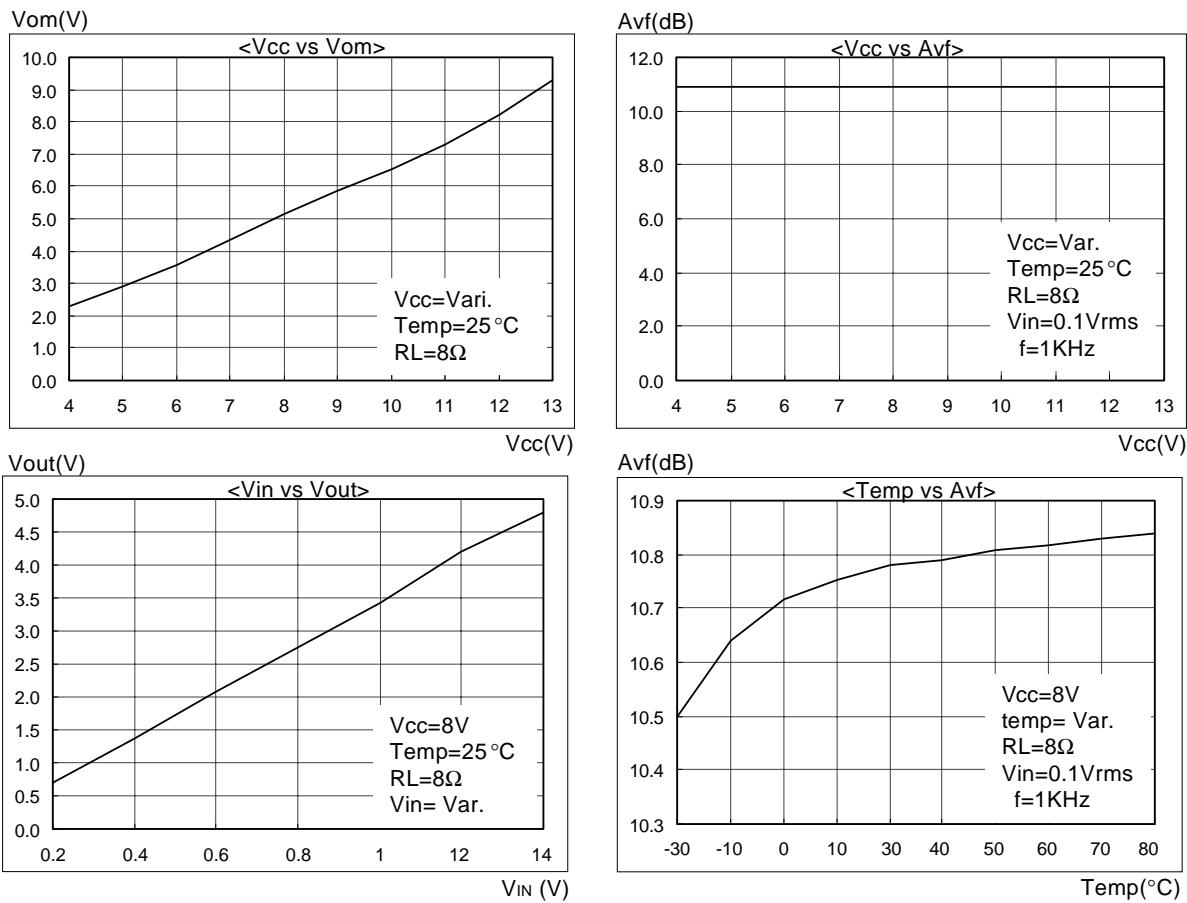

Typical Performance Characteristics (Continued)

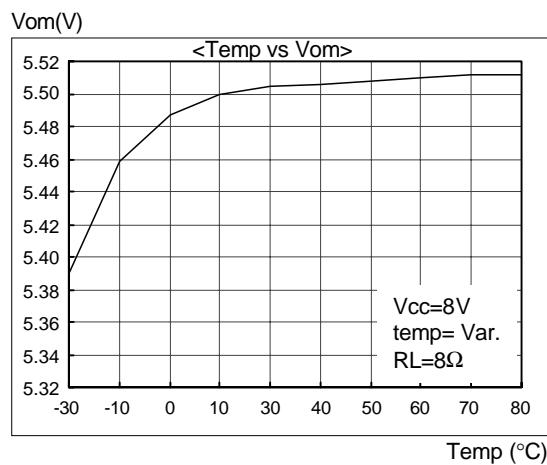


Tray drive part

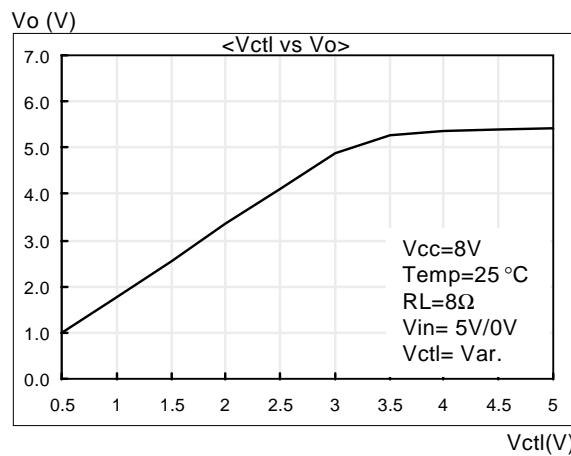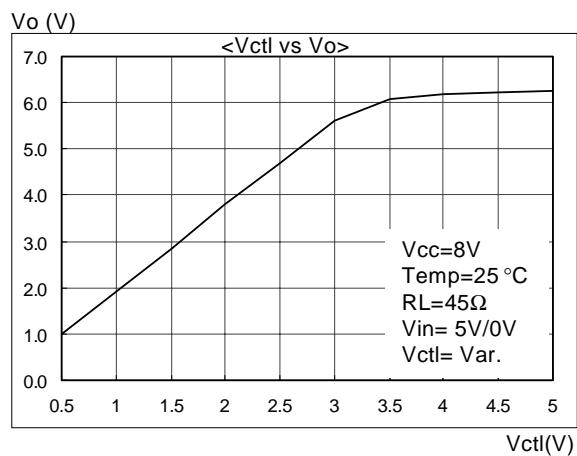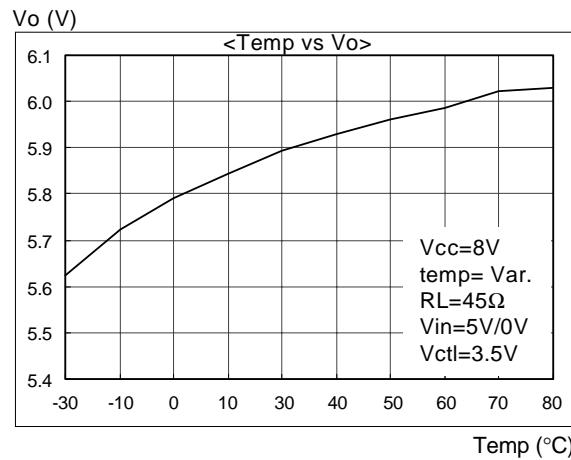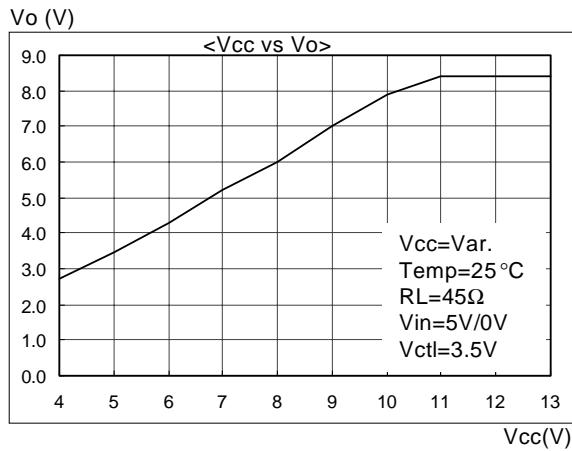


Typical Performance Characteristics (Continued)


Regulator part

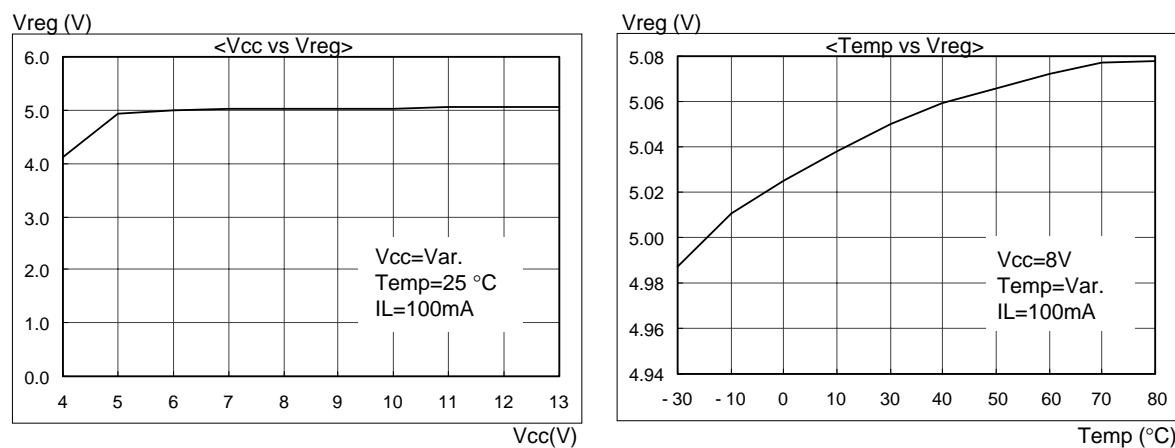




Normal Op Amp part

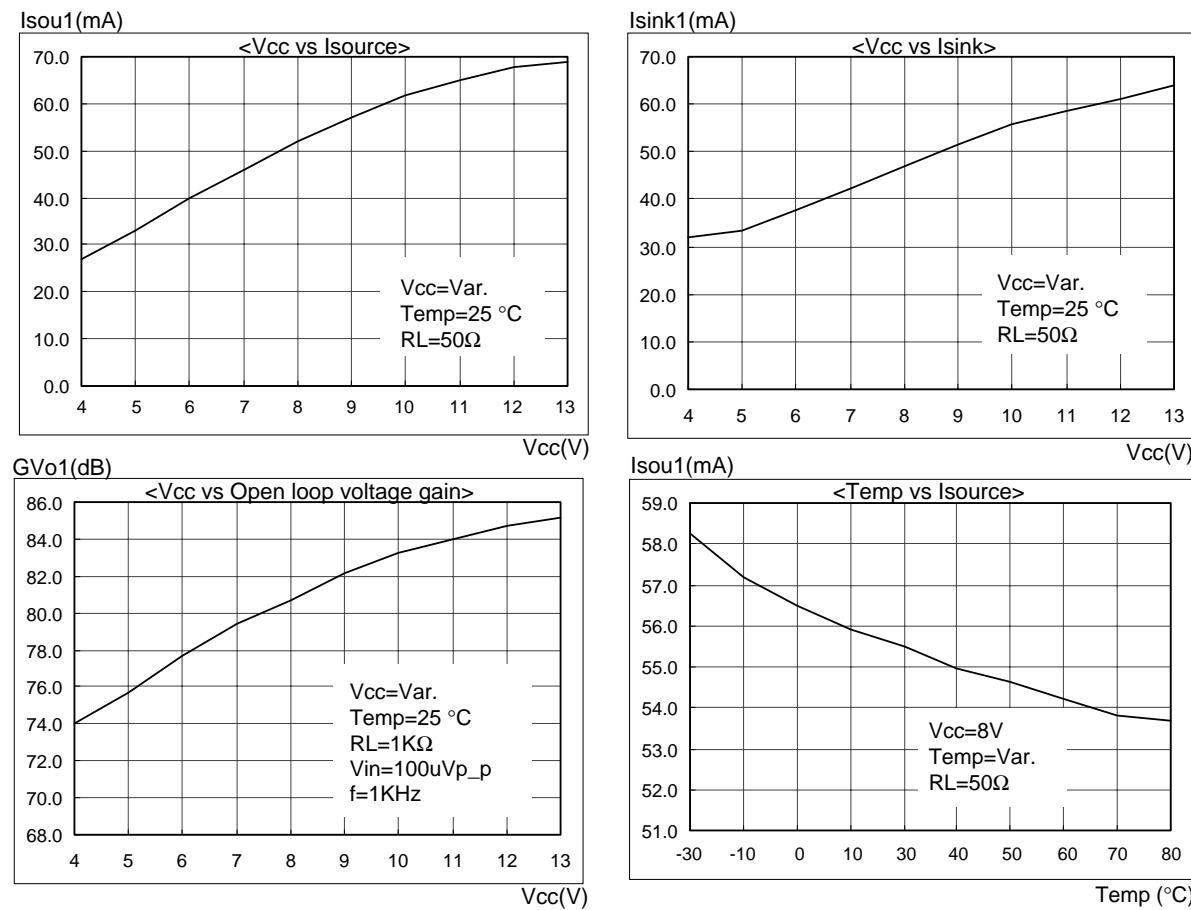


Typical Performance Characteristics (Continued)

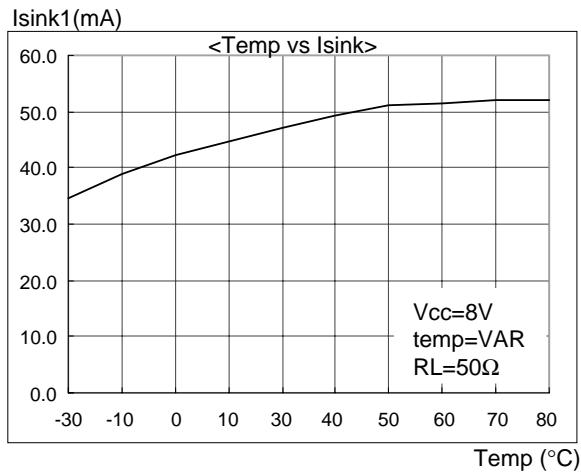

Input Op Amp part

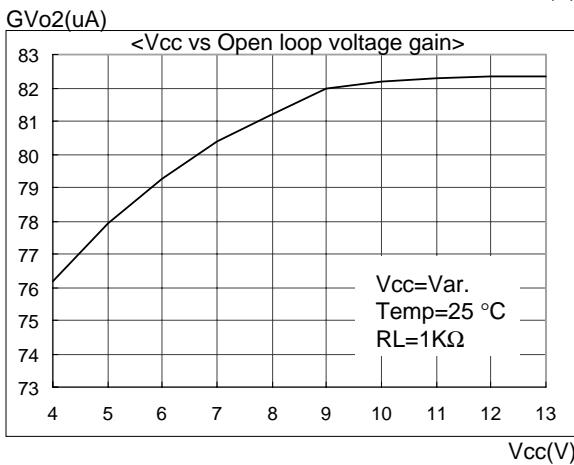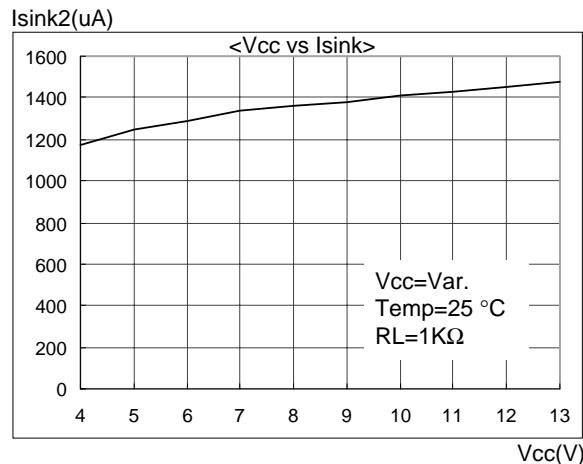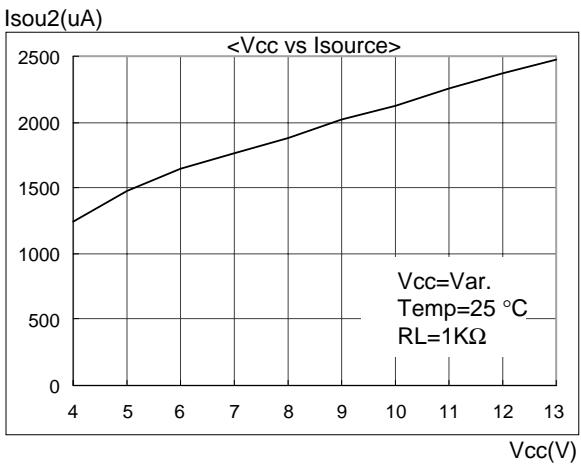


Test Circuit

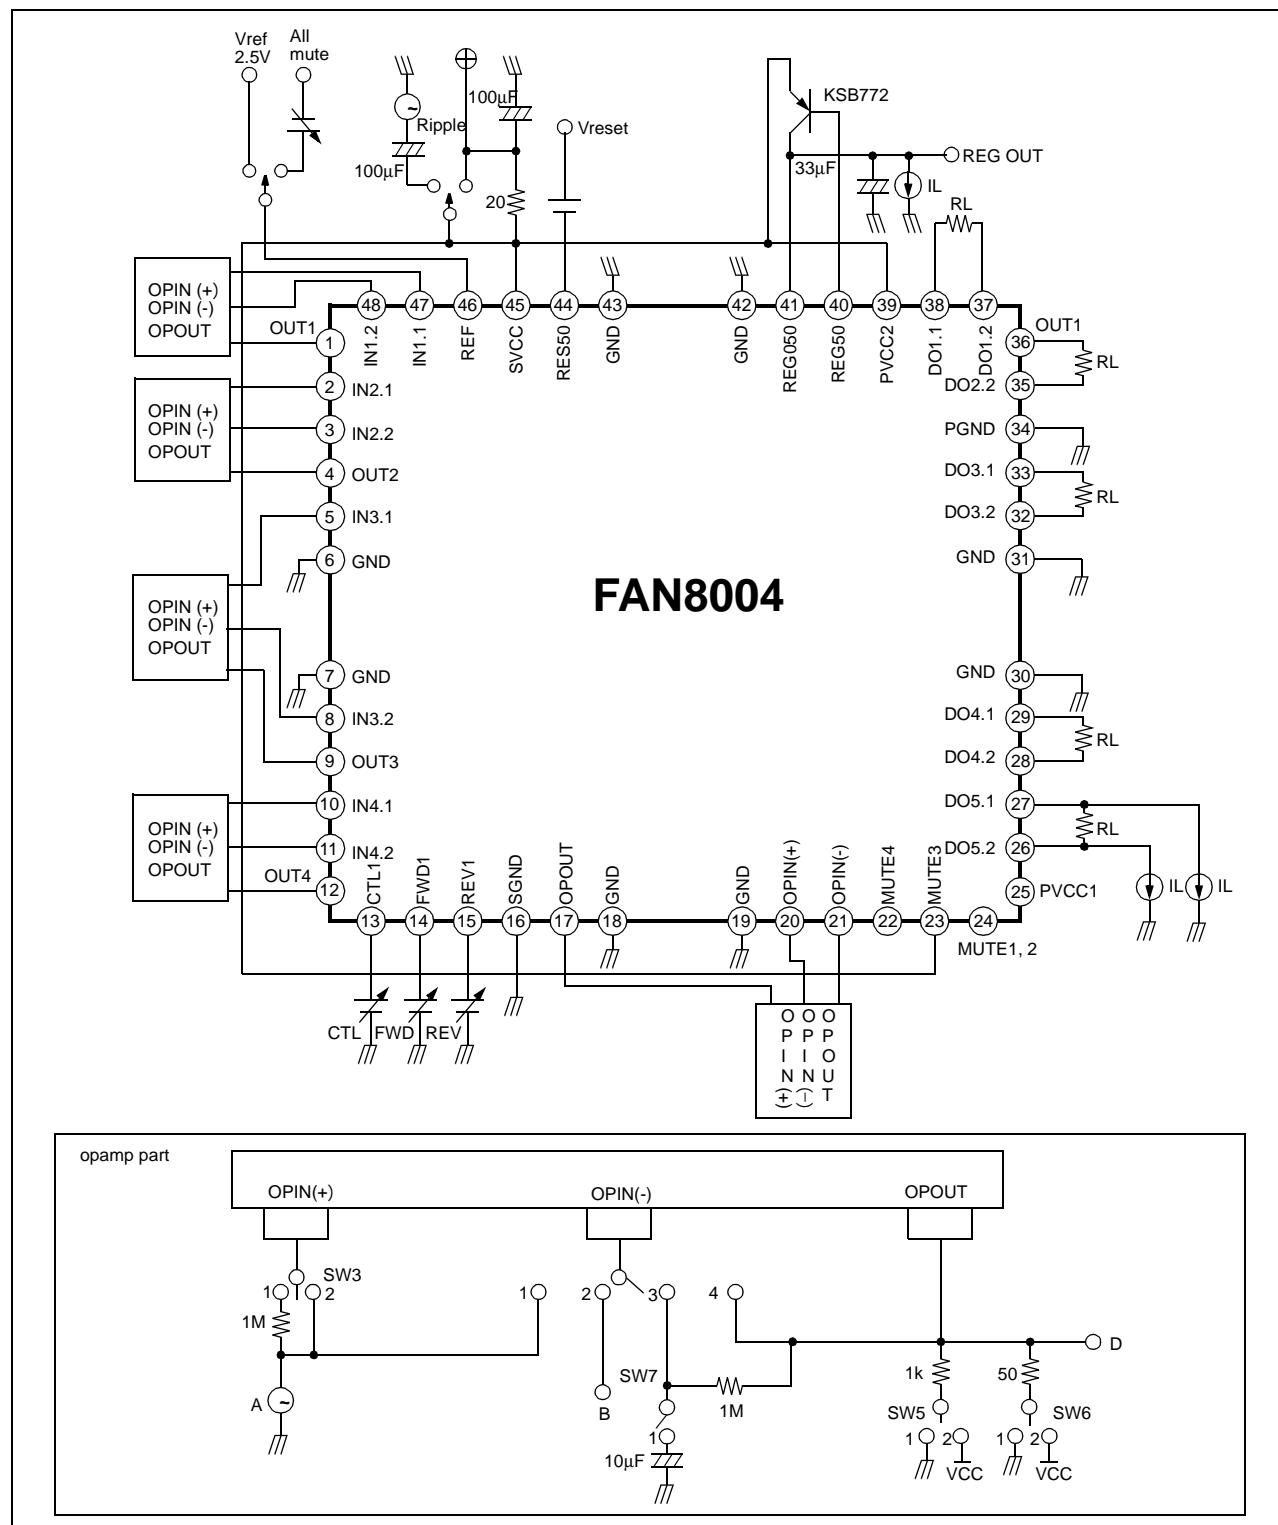

Typical Application Circuit

(Voltage Mode Control)

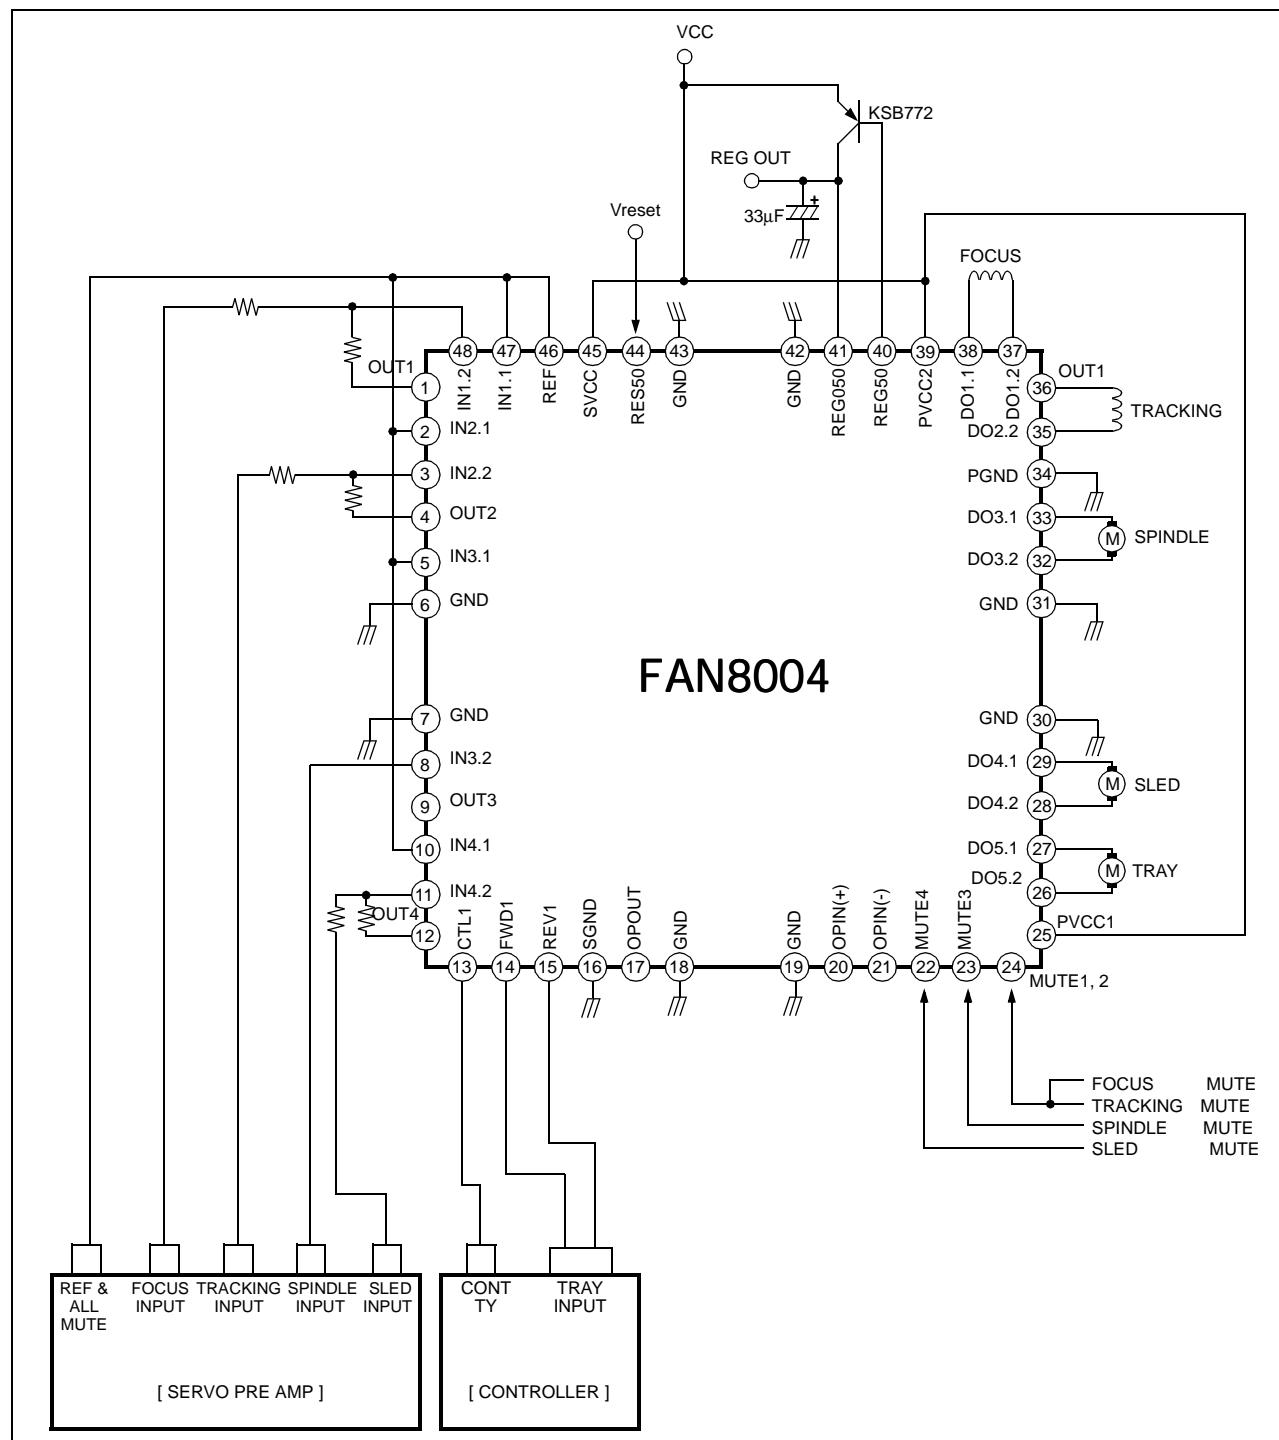


Notes:

CONT: Controller

TY: Tray

Typical Application Circuit

(Differential mode control)

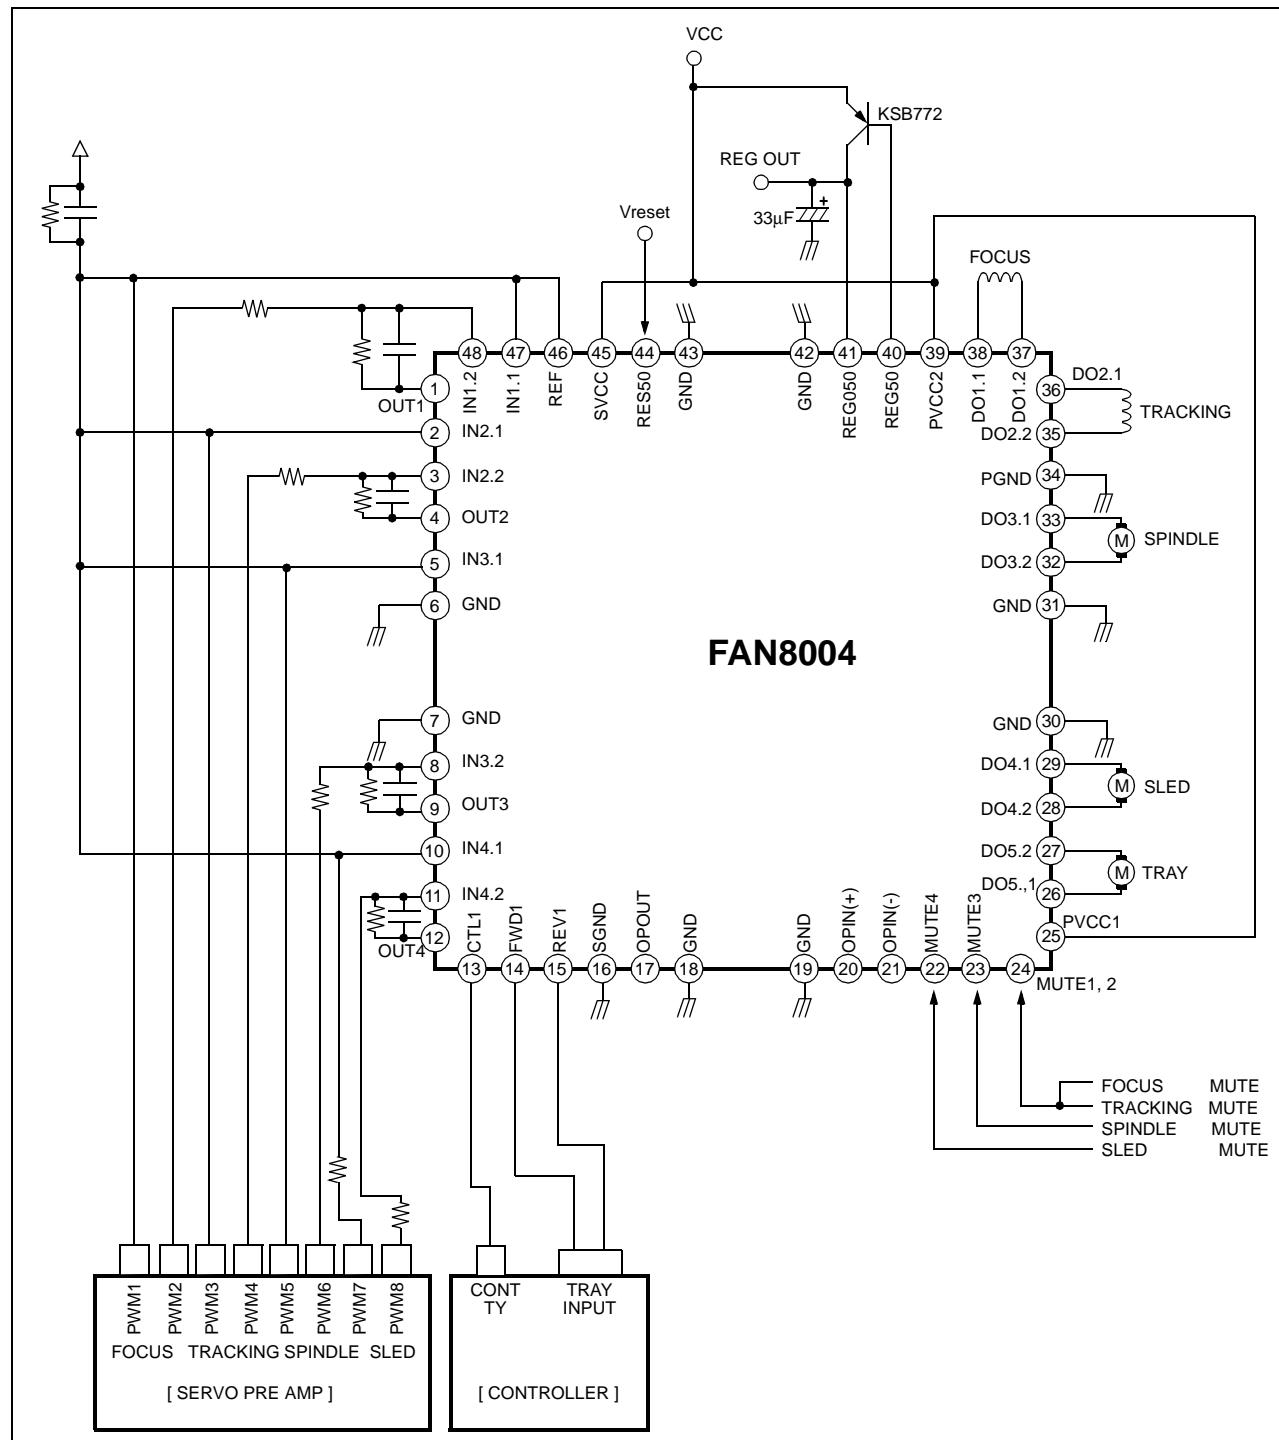

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.