



一 華 半 導 體 有 限 公 司
MOSDESIGN SEMICONDUCTOR CORP.

“TENTATIVE”

TAIPEI : TEL : 886-2- 22783733

FAX : 886-2- 22783633

H.K. : TEL : 852- 27569109

FAX : 852- 27566961

VOICE

M5106



6 SEC VOICE

6 秒 語 音 IC

FEATURES 功能敘述

- LO : BusyH, BusyL, StopH, StopL, 3 Hz, 6 Hz, 1/4 1/2 3/4 level.
- PW1 : PWM output 1.
- PW2 : PWM output 2.
- TG : OSH LH CONT RETRIG IRRETRIG
- Debounce time : 10ms 50 μ s
- Voice + Mute length MAX. 5.3 sec, repeat 8 times.

APPLICATION 產品應用


- Toy s, Clock, Pager, Game etc..

ELECTRICAL CHARACTERISTICS 電氣規格

(@ $V_{DD}=3V$ unless otherwise specified)

Characteristics	Sym.	Min.	Typ.	Max.	Unit	REMARKS
工作電壓 Operating Voltage	V_{DD}	2.4	3	5.0	V	
工作電流 Operating Current	I_{OP}	—	0.2	1	mA	No load
靜態電流 Quiescent Current	I_{SB}	—	1	5	μ A	
推動電流 AUD Driving Current	I_O	—	-3	—	mA	@ $V_{out}=0.7V$, Full Scale
推動電流 LO Driving Current	I_{OH}	1	—	—	mA	@ $V_{out}=2V$
	I_{OL}	3	—	—		@ $V_{out}=1.0V$
振盪頻率 Oscillator Frequency	F_{OSC}	—	768	—	KHz	External $\pm 30\%$, $R_{osc}=K\Omega$
工作溫度 Operating Temperature	Temp.	-10	25	60	$^{\circ}C$	

APPLICATION DIAGRAM 參考電路圖

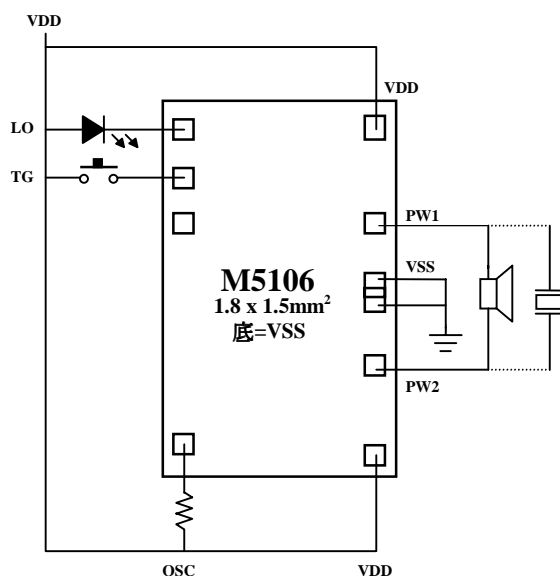

*All specs and applications shown above subject to change without prior notice.

(以上電路及規格僅供參考,本公司得逕行修正)