

### Complementary power transistors

#### **Features**

- Low collector-emitter saturation voltage
- Complementary NPN PNP transistors

### **Applications**

- General purpose
- Audio Amplifier

#### **Description**

The devices are manufactured in epitaxial-base planar technology and are suitable for audio, power linear and switching applications.




Figure 1. Internal schematic diagram




Table 1. Device summary

	Order code	Marking	Package	Packaging
Ī	2N3055	2N3055	TO-3	tray
ſ	MJ2955	MJ2955	10-3	liay

January 2008 Rev 7 1/7

Absolute maximun rating 2N3055 MJ2955

## 1 Absolute maximun rating

Table 2. Absolute maximum rating

Symbol	Parameter		Value	Unit
		NPN	2N3055	
		PNP	MJ2955	
V <sub>CBO</sub>	Collector-emitter voltage (I <sub>E</sub> = 0)		100	V
V <sub>CER</sub>	Collector-emitter voltage (R <sub>BE</sub> = 100 Ω)		70	V
V <sub>CEO</sub>	Collector-emitter voltage (I <sub>B</sub> = 0)		60	V
V <sub>EBO</sub>	Collector-base voltage (I <sub>C</sub> = 0)		7	V
I <sub>C</sub>	Collector current		15	Α
I <sub>B</sub>	Base current		7	Α
P <sub>TOT</sub>	Total dissipation at T <sub>c</sub> ≤25°C		115	W
T <sub>stg</sub>	Storage temperature		-65 to 200	°C
T <sub>J</sub>	Max. operating junction temperature		200	°C

Note: For PNP type voltage and current values are negative

**577** 

2N3055 MJ2955 Electrical characteristics

## 2 Electrical characteristics

 $(T_{case} = 25^{\circ}C; unless otherwise specified)$ 

Table 3. Electrical characteristics

Symbol	Parameter	Test co	onditions	Min.	Тур.	Max.	Unit
I <sub>CEX</sub>	Collector cut-off current (V <sub>BE</sub> = -1.5 V)	V <sub>CE</sub> = 100 V V <sub>CE</sub> = 100 V	T <sub>C</sub> = 150 °C			1 5	mA mA
I <sub>CEO</sub>	Collector cut-off current (I <sub>B</sub> = 0)	V <sub>CE</sub> = 30 V				0.7	mA
I <sub>EBO</sub>	Emitter cut-off current (I <sub>C</sub> = 0)	V <sub>EB</sub> = 7 V				5	mA
V <sub>CEO(sus)</sub> <sup>(1)</sup>	Collector-emitter sustaining voltage (I <sub>B</sub> = 0)	I <sub>C</sub> = 200 mA		60			V
V <sub>CER(sus)</sub> <sup>(1)</sup>	Collector-emitter sustaining voltage ( $R_{BE} = 100 \Omega$ )	I <sub>C</sub> = 200 mA		70			V
V <sub>CE(sat)</sub> <sup>(1)</sup>	Collector-emitter saturation voltage	$I_C = 4 A$ $I_C = 10 A$	$I_B = 400 \text{ mA}$ $I_B = 3.3 \text{ A}$			1 3	V V
V <sub>BE</sub> <sup>(1)</sup>	Base-emitter voltage	I <sub>C</sub> = 4 A	V <sub>CE</sub> = 4 V			1.8	V
h <sub>FE</sub> <sup>(1)</sup>	DC current gain	I <sub>C</sub> = 4 A I <sub>C</sub> = 10 A	V <sub>CE</sub> = 4 V V <sub>CE</sub> = 4 V	20 5		70	

<sup>1.</sup> Pulsed: Pulse duration = 300  $\mu$ s, duty cycle  $\leq$ 1.5%

Note: For PNP type voltage and current values are negative


## 3 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com



#### TO-3 mechanical data

DIM.	mm.					
DIW.	min.	typ	max.			
А	11.00		13.10			
В	0.97		1.15			
С	1.50		1.65			
D	8.32		8.92			
E	19.00		20.00			
G	10.70		11.10			
N	16.50		17.20			
Р	25.00		26.00			
R	4.00		4.09			
U	38.50		39.30			
V	30.00		30.30			

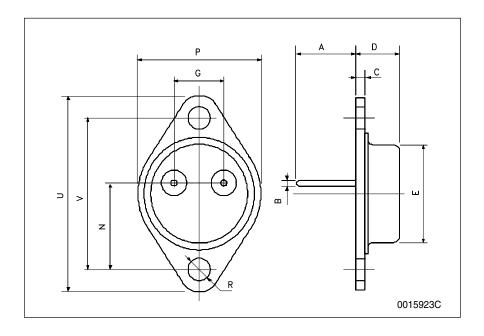

5//

Revision history 2N3055 MJ2955

# 4 Revision history

Table 4. Document revision history

Date	Revision	Changes
11-Oct-1999	6	
29-Jan-2007	7	Content reworked to improve readability, no technical changes

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZE REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



7/7