

**Pb Free Plating Product**

FMU31R/FMU32R/FMU33R/FMU34R/FMU35R/FMU36R  

20.0 Ampere Heatsink Dual Common Anode Ultra Fast Recovery Rectifiers

#### Features

- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

#### Application



- ★ Automotive Inverters and Solar Inverters
- ★ Plating Power Supply, Motor Control, SMPS and UPS
- ★ Car Audio Amplifiers and Sound Device Systems

#### Mechanical Data

- ★ Case: Heatsink TO-3PN open metal package
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Polarity: As marked on diode body
- ★ Mounting position: Any
- ★ Weight: 0.61 gram approximately

#### TO-3PN

② Bottom Side Metal Heat Sink

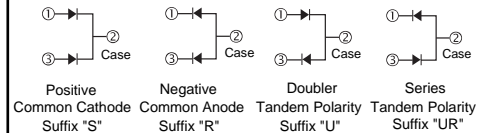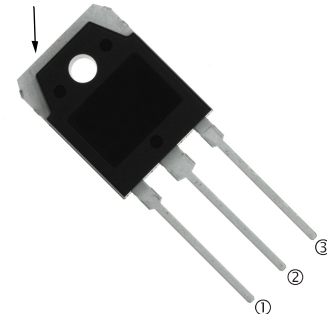

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	FMU31R FMU32R	FMU33R FMU34R	FMU35R FMU36R	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	200	400	600	V
Maximum RMS Voltage	VRMS	140	280	420	V
Maximum DC Blocking Voltage	VDC	200	400	600	V
Maximum Average Forward Rectified Current Tc=125℃ (Total Device 2x10A=20A)	IF(AV)	20.0			A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	200			A
Maximum Instantaneous Forward Voltage @ 10.0 A (Per Diode/Per Leg)	VF	0.98	1.3	1.7	V
Maximum DC Reverse Current @TJ=25℃ At Rated DC Blocking Voltage @TJ=125℃	IR	5.0 100			μA μA
Maximum Reverse Recovery Time (Note 1)	Trr	35			nS
Typical junction Capacitance (Note 2)	CJ	120	70		pF
Typical Thermal Resistance (Note 3)	RθJC	0.85			℃/W
Operating Junction and Storage Temperature Range	TJ, TSTG	-55 to + 150			℃

NOTES : (1) Reverse recovery test conditions I<sub>F</sub> = 0.5A, R = 1.0A, I<sub>rr</sub> = 0.25A.

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

(3) Thermal Resistance junction to case.

FIG.1 - FORWARD CURRENT DERATING CURVE

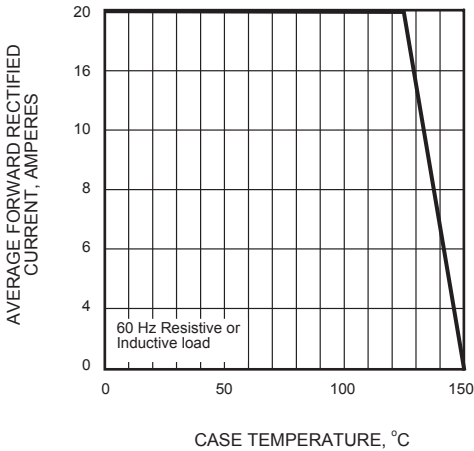


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

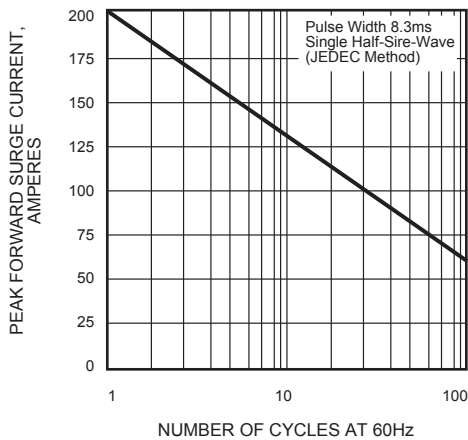


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

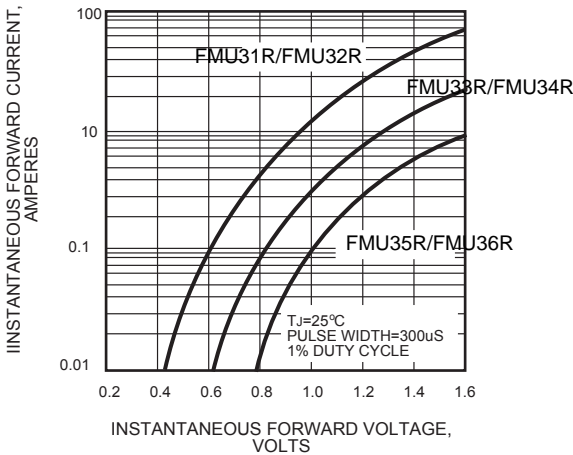


FIG.4 - TYPICAL REVERSE CHARACTERISTICS



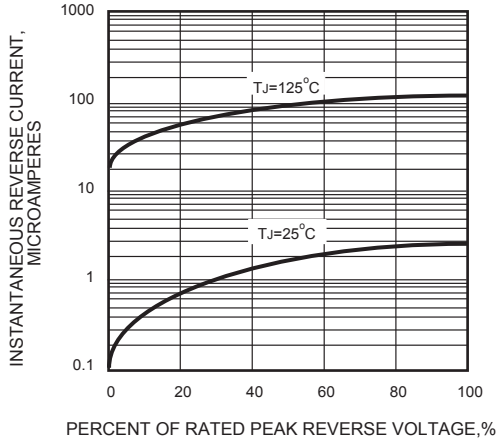


FIG.5 - TYPICAL JUNCTION CAPACITANCE

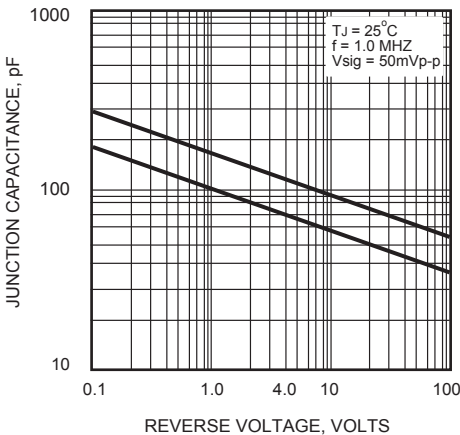

Package Information

TO-3PN Package Outline

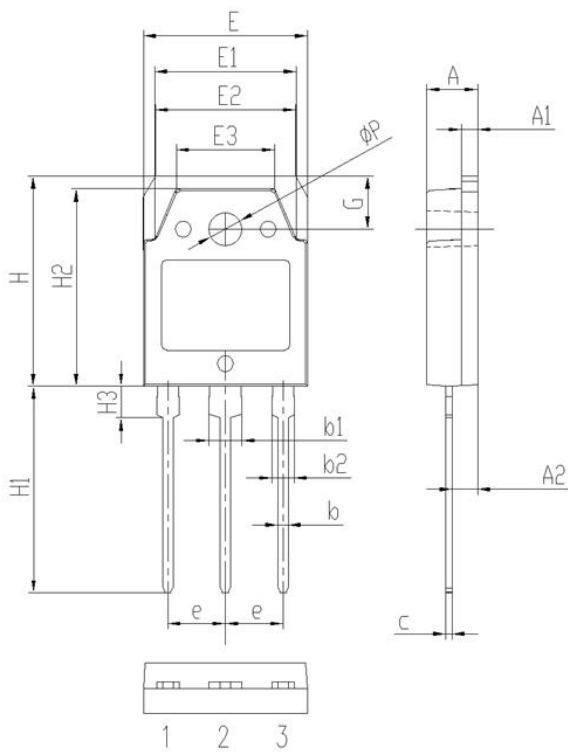

Symbol	Dimensions(millimeters)	
	Min.	Max.
A	4.60	5.00
A1	1.50	2.00
A2	2.20	2.60
b	0.80	1.20
b1	2.90	3.30
b2	1.90	2.30
c	0.40	0.80
e	5.25	5.65
E	15.3	15.7
E1	13.2	13.6
E2	13.1	13.5
E3	9.10	9.50
H	19.7	20.1
H1	19.1	20.1
H2	18.3	18.7
H3	2.80	3.20
G	4.80	5.20
ΦP	3.00	3.40