

International
IR Rectifier

30CPQ080
30CPQ100

SCHOTTKY RECTIFIER

30 Amp


Major Ratings and Characteristics

Characteristics	30CPQ...	Units
$I_{F(AV)}$ Rectangular waveform	30	A
V_{RRM}	80/100	V
I_{FSM} @ $t_p = 5 \mu s$ sine	920	A
V_F @ 15 Apk, $T_J = 125^\circ C$ (per leg)	0.67	V
T_J	-55 to 175	$^\circ C$

Description/Features

The 30CPQ... center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to $175^\circ C$ junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $175^\circ C$ T_J operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

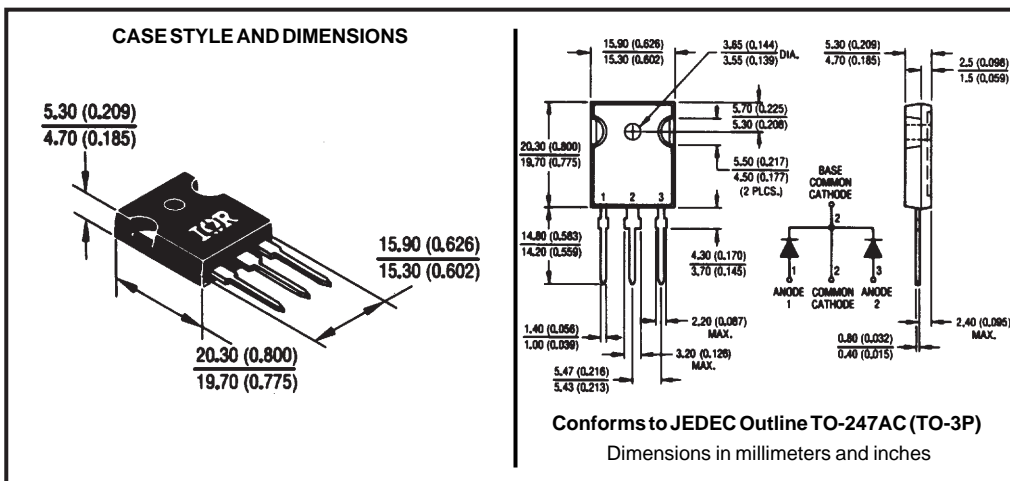

Voltage Ratings

Part number	30CPQ080	30CPQ100
V_R Max. DC Reverse Voltage (V)	80	100
V_{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters		30CPQ...	Units	Conditions		
$I_{F(AV)}$	Max.AverageForwardCurrent * See Fig. 5	30	A	50% duty cycle @ $T_C = 140^{\circ}\text{C}$, rectangular wave form		
I_{FSM}	Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	920	A	5 μs Sine or 3 μs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied	
		240		10ms Sine or 6ms Rect. pulse		
E_{AS}	Non-Repetitive Avalanche Energy (Per Leg)	7.50	mJ	$T_J = 25^{\circ}\text{C}$, $I_{AS} = 0.50$ Amps, L = 60 mH		
I_{AR}	Repetitive Avalanche Current (Per Leg)	0.50	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical		

Electrical Specifications

Parameters		30CPQ...	Units	Conditions	
V _{FM}	Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.86	V	@ 15A	T _J = 25 °C
		1.05	V	@ 30A	
		0.67	V	@ 15A	T _J = 125 °C
		0.81	V	@ 30A	
I _{RM}	Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	0.55	mA	T _J = 25 °C	V _R = rated V _R
		7	mA	T _J = 125 °C	
C _T	Max. Junction Capacitance (Per Leg)	500	pF	V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25°C	
L _S	Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V _R)	10,000	V/ μs		

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	30CPQ...	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 175	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	2.20	$^\circ\text{C/W}$	DC operation * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	1.10	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.24	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	6(0.21)	g(oz.)	
T Mounting Torque	Min. 6(5)	Kg-cm (lbf-in)	Non-lubricated threads
	Max. 12(10)		
Case Style	TO-247AC(TO-3P)	JEDEC	

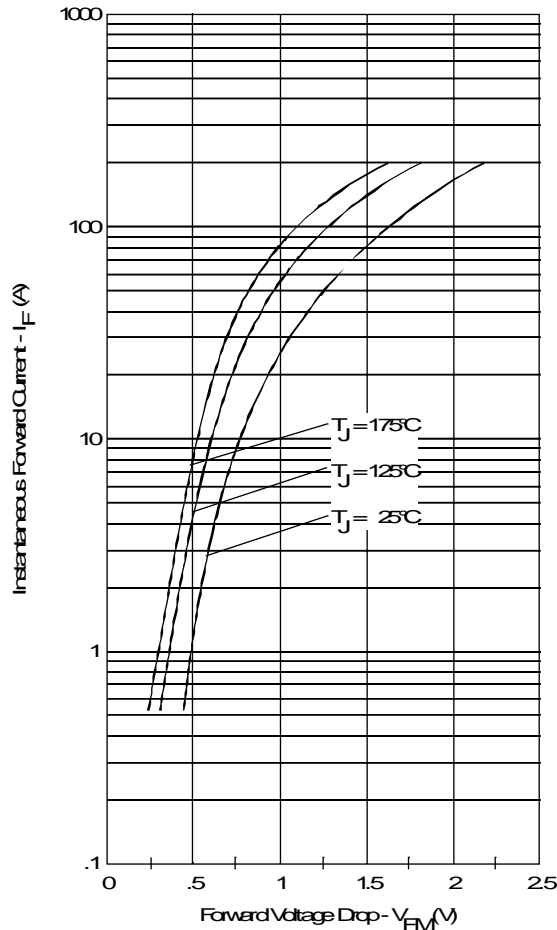


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

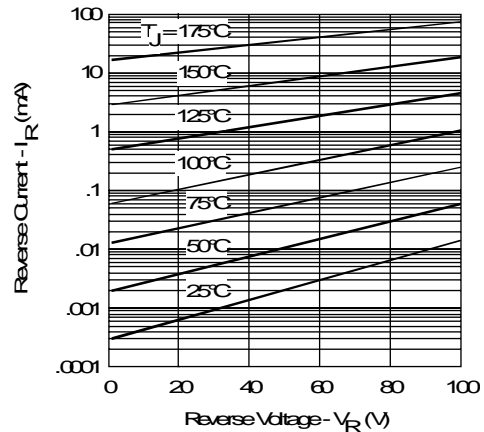


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

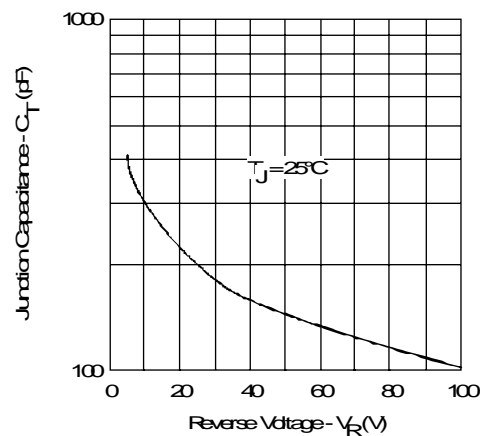


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

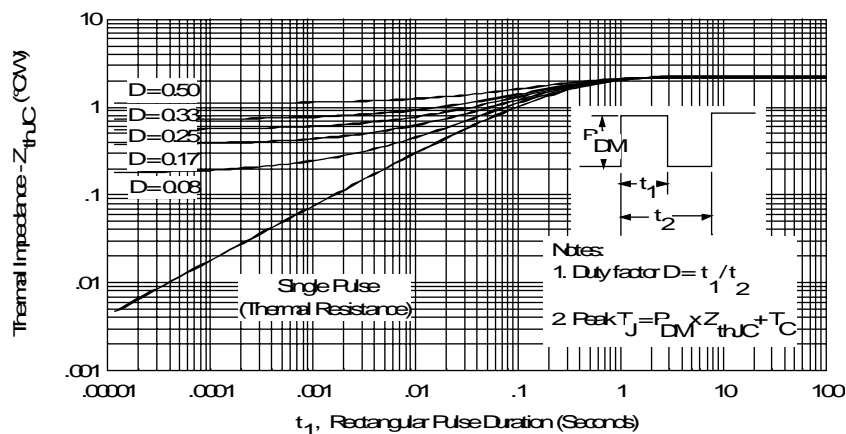


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

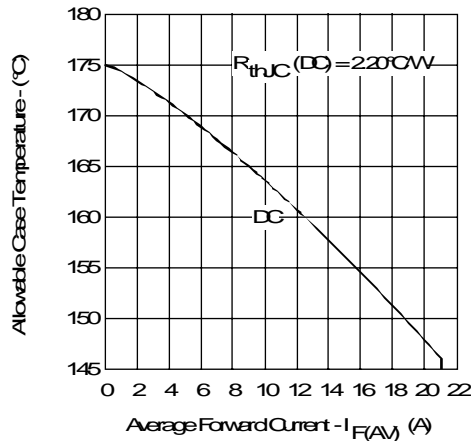


Fig. 5- Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

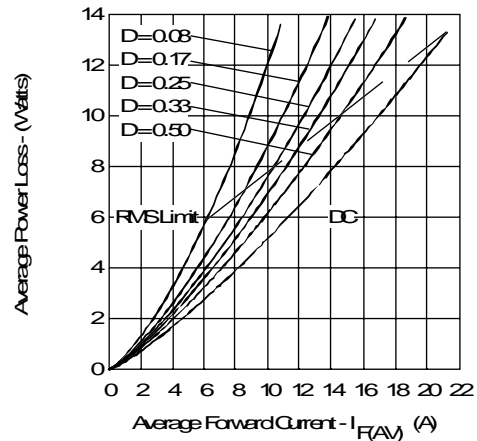


Fig. 6- Forward Power Loss Characteristics (Per Leg)

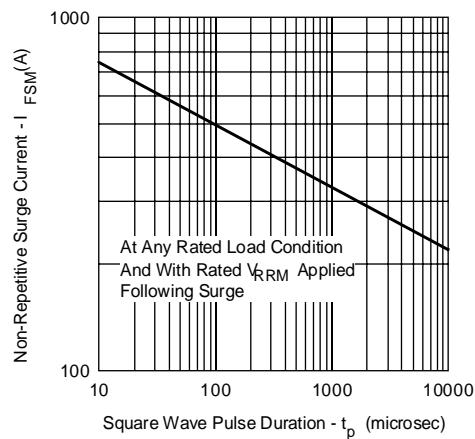


Fig. 7- Max. Non-Repetitive Surge Current (Per Leg)

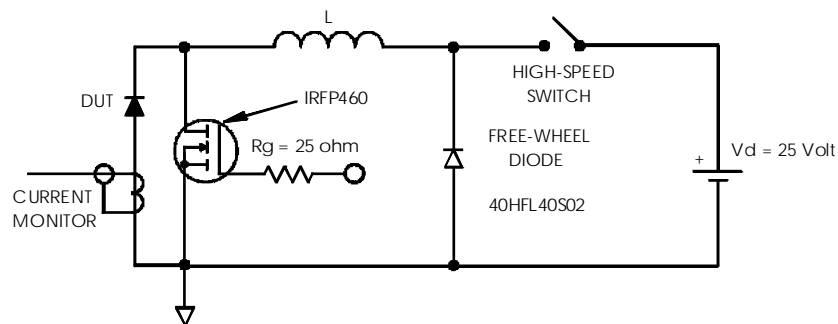


Fig. 8- Unclamped Inductive Test Circuit